

# Business Processes Modelling

## MPB (6 cfu, 295AA)


Roberto Bruni

<http://www.di.unipi.it/~bruni>

17 - T-systems



# Object

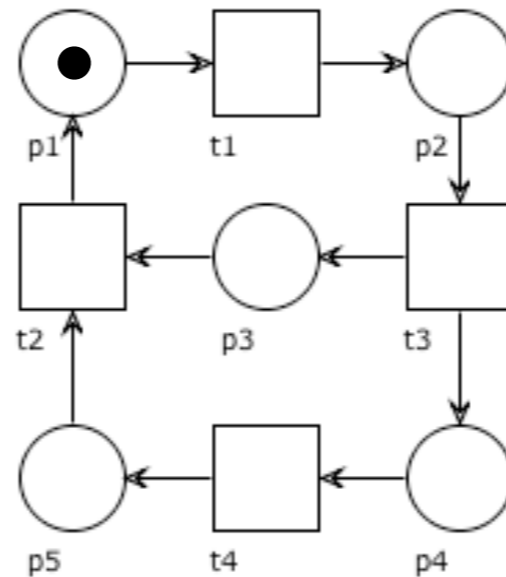

We study some “good” properties of T-systems

Free Choice Nets (book, optional reading)

<https://www7.in.tum.de/~esparza/bookfc.html>

T-systems




# T-system

**Definition:** We recall that a net  $N$  is a **T-net** if each place has exactly one input transition and exactly one output transition

$$\forall p \in P, \quad |\bullet p| = 1 = |p \bullet|$$

A system  $(N, M_0)$  is a **T-system** if  $N$  is a T-net

# T-net: example

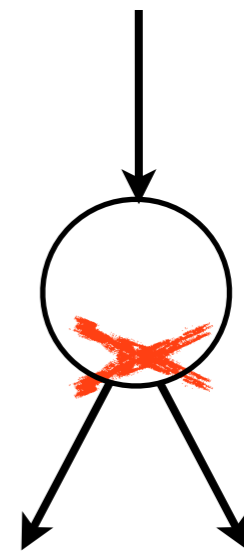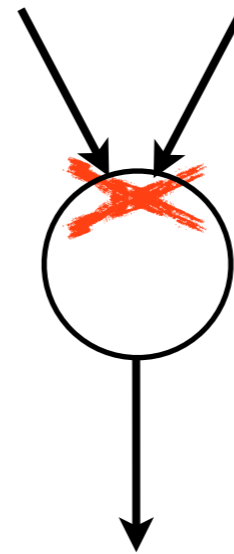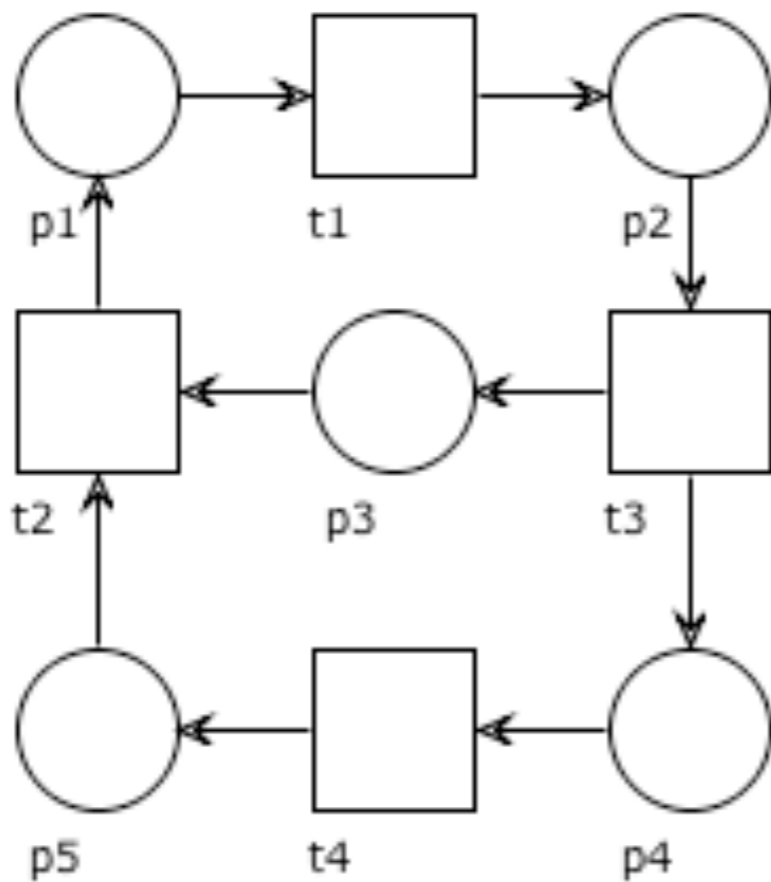

# T-systems: an observation

Notably, computation in T-systems is concurrent,  
but essentially deterministic:

the firing of a transition  $t$  in  $M$  cannot disable  
another transition  $t'$  enabled at  $M$

# T-net $N^*$

Is the following conjecture true?  
A workflow net  $N$  is a T-net  
iff  $N^*$  is a T-net

# T-net $N^*$

Is the following conjecture true?

A workflow net  $N$  is a T-net  
iff  $N^*$  is a T-net


No, a workflow net cannot be a T-net because  
the place  $i$  has no incoming arc  
and the place  $o$  has no outgoing arc

(but  $N^*$  can be a T-net)




# T-net $N^*$ : example

$N$  is a workflow net  
but not a T-net

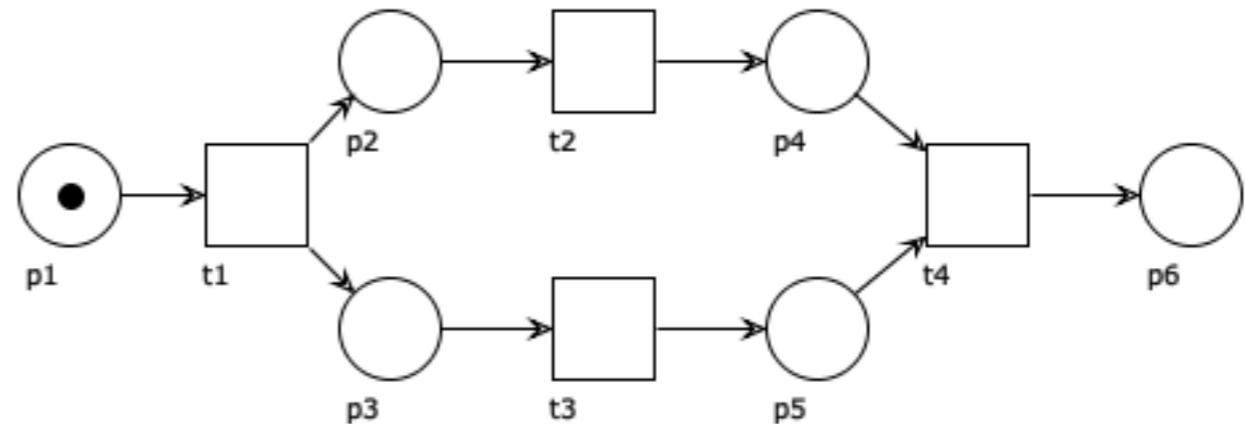

$N^*$  is a T-net  
(not a workflow net)

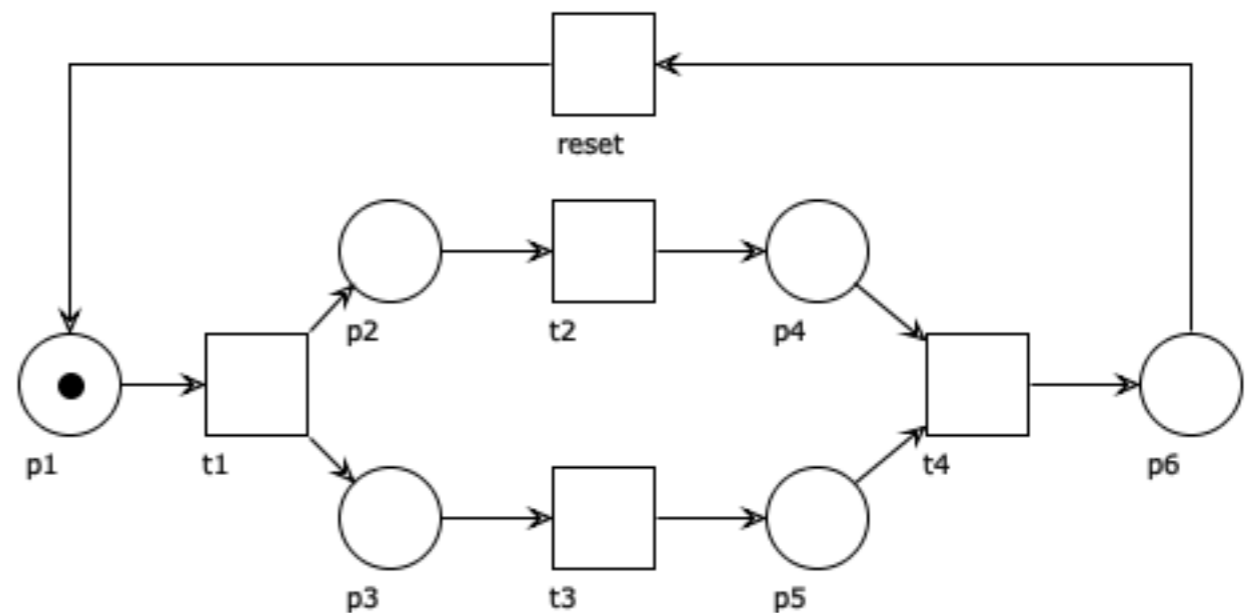

# T-systems: another observation

Determination of control:

the transitions responsible for enabling  $t$  are  
one for each input place of  $t$

# Notation: token count of a circuit

Let  $\gamma = (x_1, y_1)(y_1, x_2)(x_2, y_2) \dots (x_n, y_n)$  be a circuit.

Let  $P_{|\gamma} \subseteq P$  be the set of places in  $\gamma$ .


$$M(\gamma) = M(P_{|\gamma}) = \sum_{p \in P_{|\gamma}} M(p)$$

We say that  $\gamma$  is **marked at**  $M$  if  $M(\gamma) > 0$

# Example

$\gamma_1 = \text{prod1 busy prod1end prod1free prod1start}$

$\gamma_2 = \text{freeslot prod1end itembuffer cons1start}$

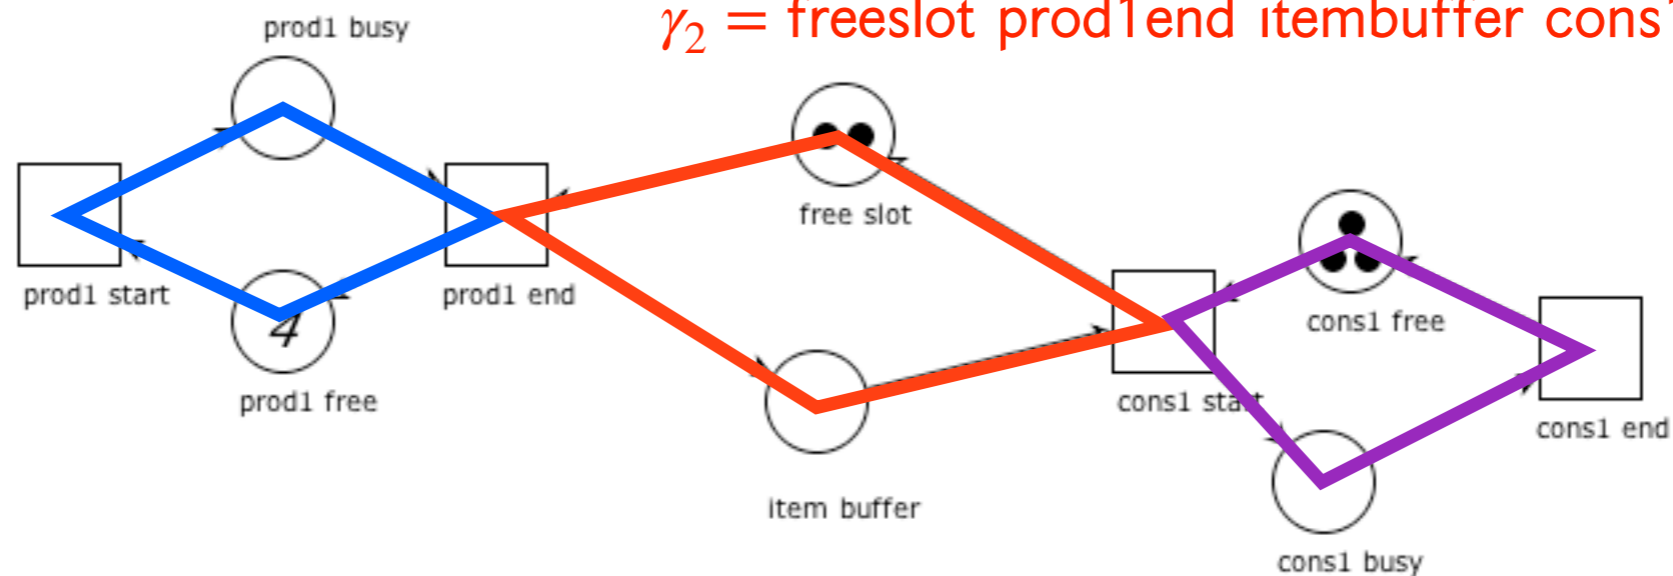

$\gamma_3 = \text{cons1 busy coons1end cons1free cons1start}$


$$M(\gamma_1) = 4$$

$$M(\gamma_2) = 2$$

$$M(\gamma_3) = 3$$


# Question time

Trace two circuits over the T-system below

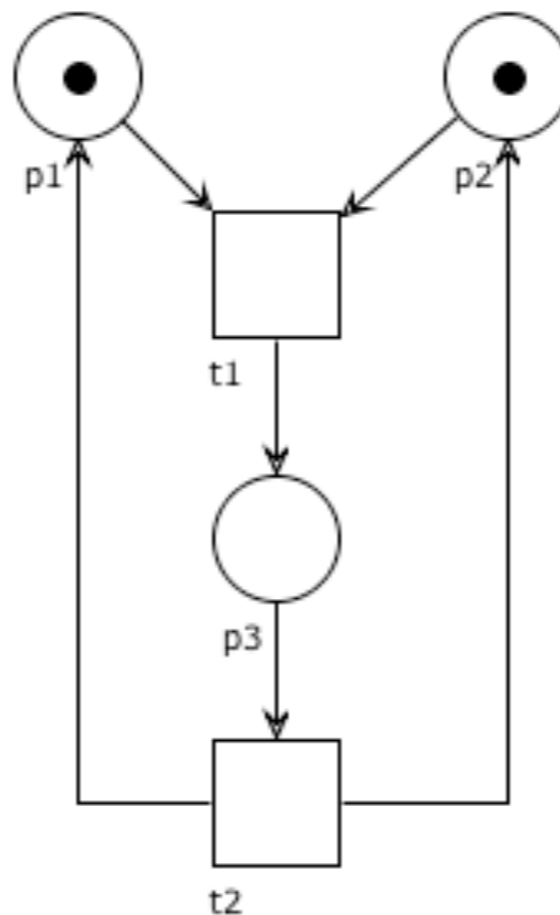

# Question time

Trace two circuits over the T-system below

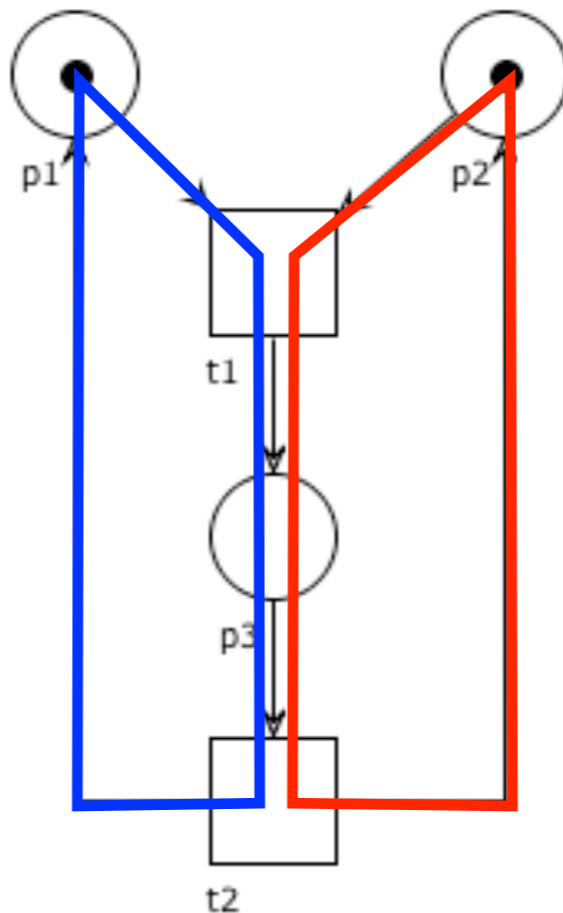

# Fundamental property of T-systems

The token count of a circuit is invariant under any firing.

# Fundamental property of T-systems

**Proposition:** Let  $\gamma$  be a circuit of a T-system  $(P, T, F, M_0)$ .  
If  $M$  is a reachable marking, then  $M(\gamma) = M_0(\gamma)$

Take any  $t \in T$ : either  $t \notin \gamma$  or  $t \in \gamma$ .


If  $t \notin \gamma$ , then no place in  $\bullet t \cup t \bullet$  is in  $\gamma$   
(otherwise, by definition of T-nets,  $t$  would be in  $\gamma$ ).

Then, an occurrence of  $t$  does not change the token count of  $\gamma$ .

If  $t \in \gamma$ , then exactly one place in  $\bullet t$  and one place in  $t \bullet$  are in  $\gamma$ .  
Then, an occurrence of  $t$  does not change the token count of  $\gamma$ .




# Example

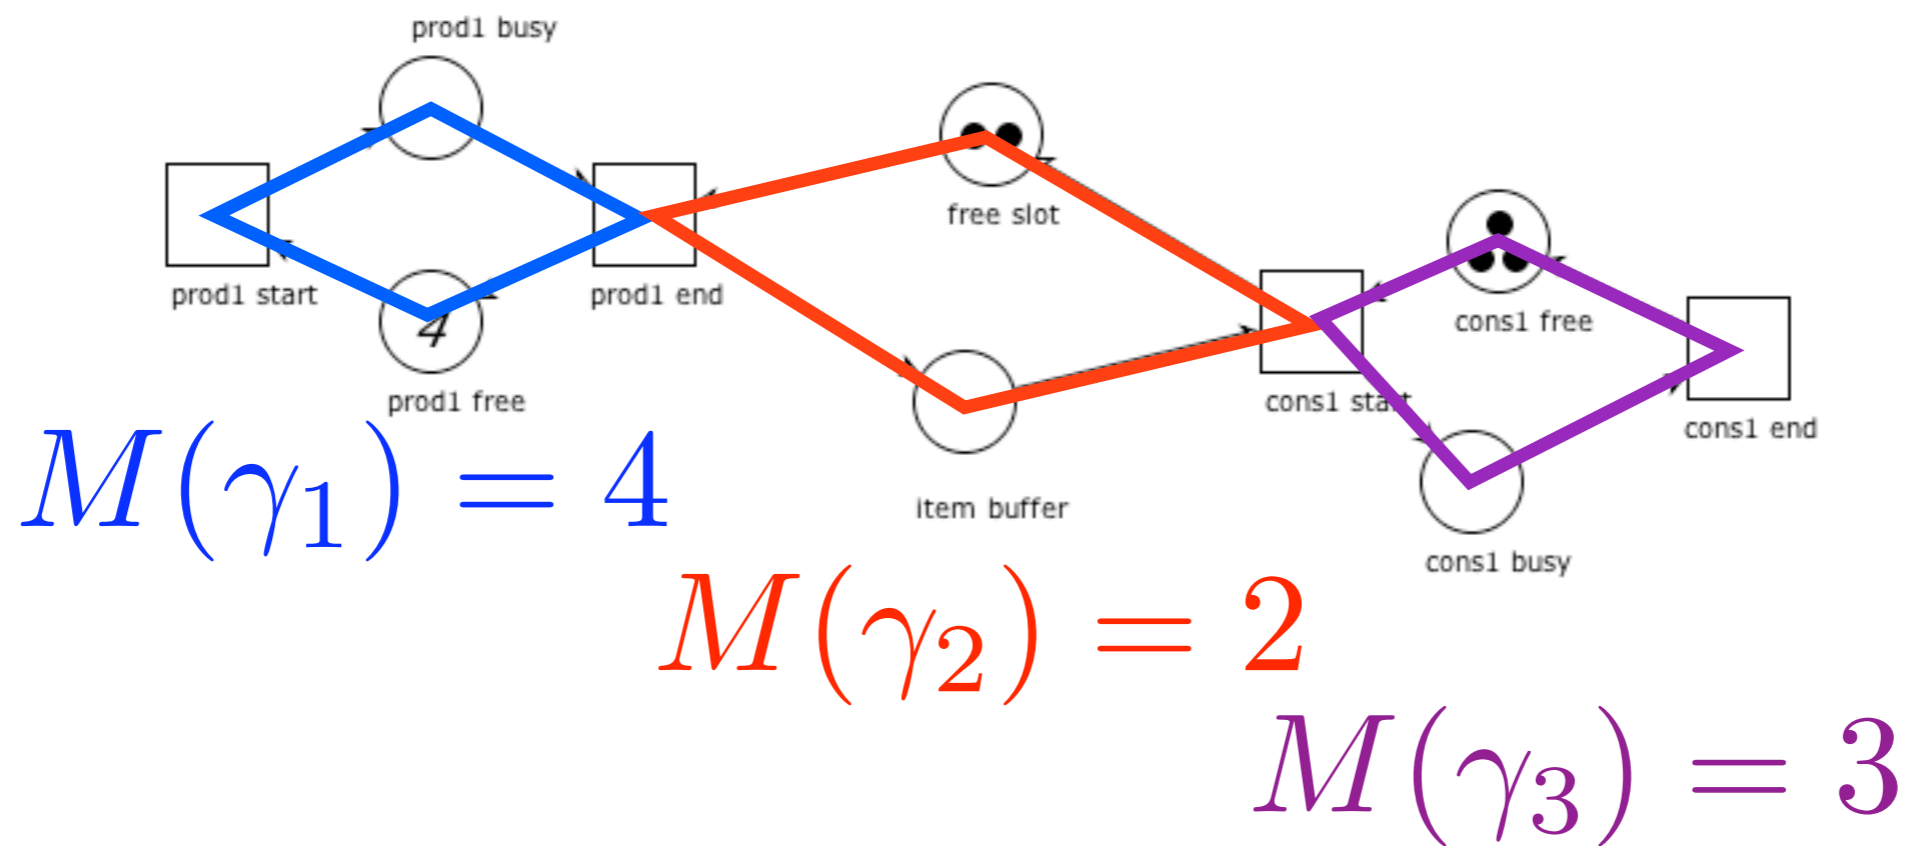

$$M_0 = [0 \ 4 \ 2 \ 0 \ 3 \ 0]$$

$$M = [2 \ 2 \ 1 \ 2 \ 2 \ 1] \quad \text{Not reachable!}$$

# Example

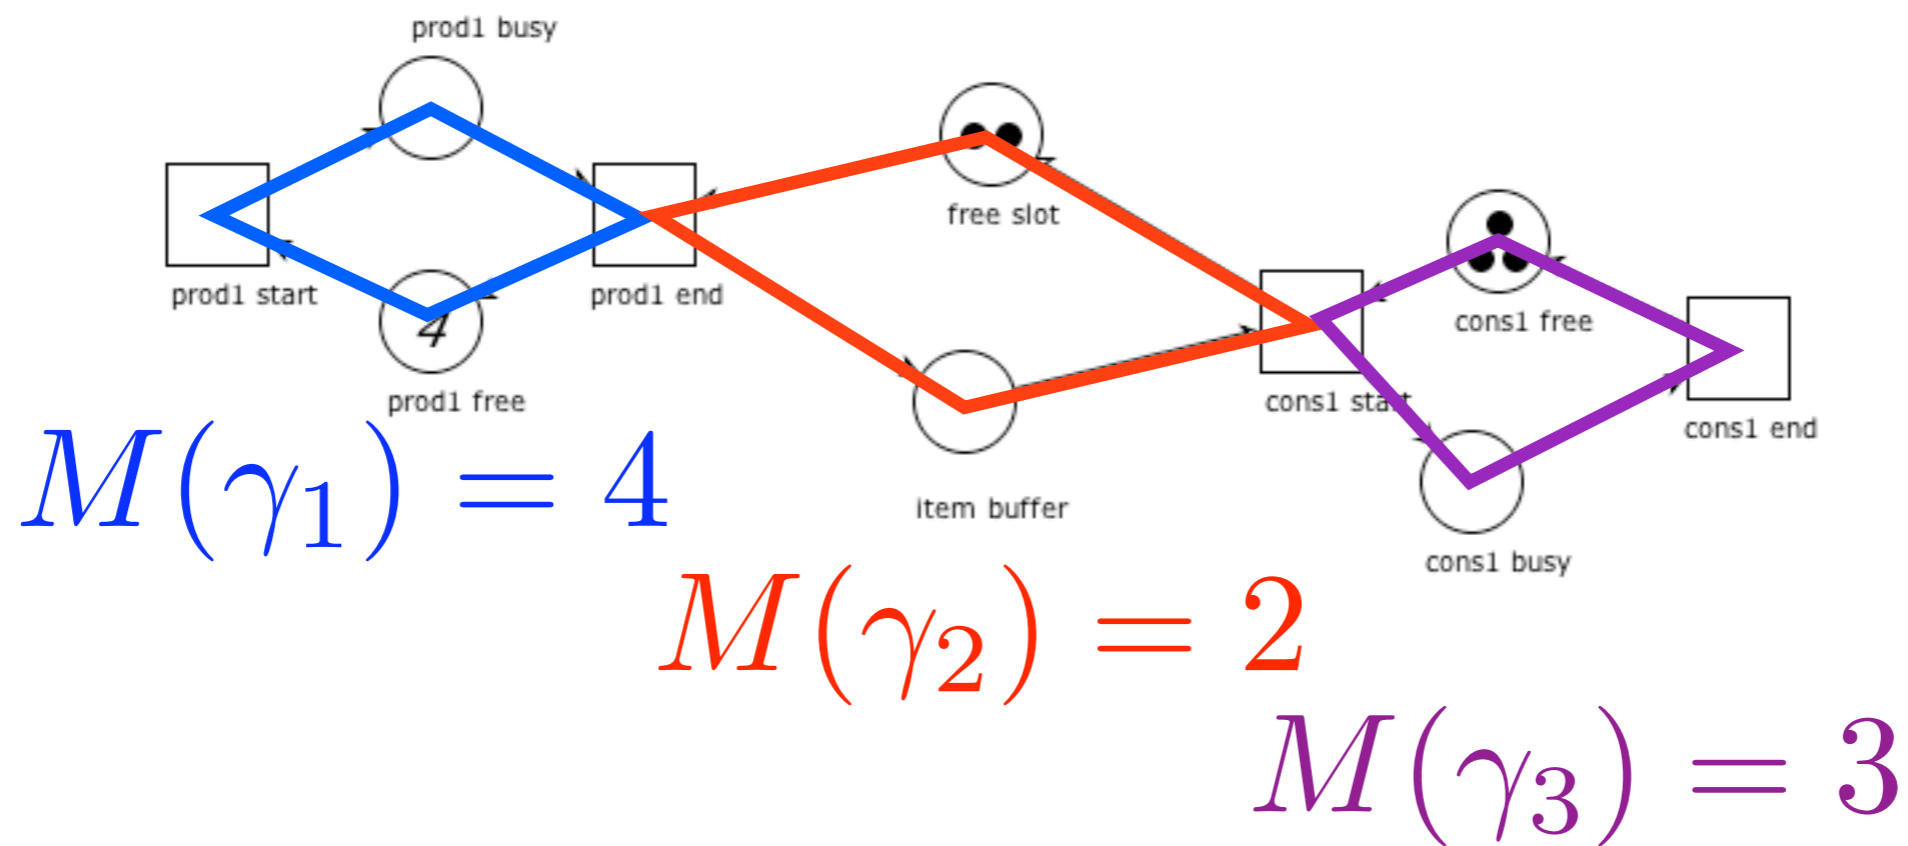


$$M_0 = [0 \ 4 \ 2 \ 0 \ 3 \ 0]$$

$$M' = [2 \ 1 \ 1 \ 1 \ 2 \ 2] \quad \text{Not reachable!}$$

# Question time

Is the marking  $p_1 + 2p_2$  reachable? (why?)

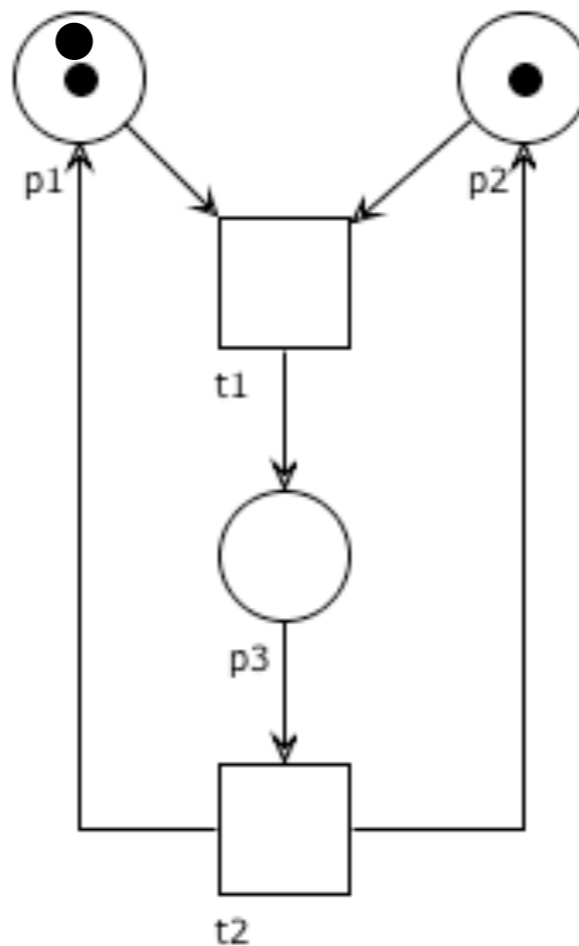

# Question time


Is the marking  $p_1 + 2p_2$  reachable? (why?)

No

the token count in  
the left (blue) circuit  
must remain 2

and

the token count in  
the right (red) circuit  
must remain 1

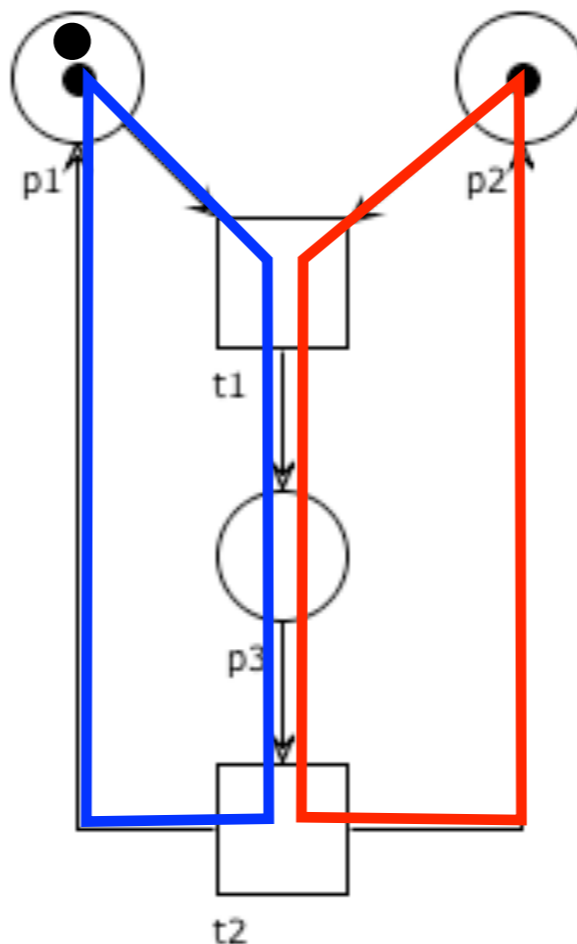

# T-invariants of T-nets

**Proposition:** Let  $N=(P,T,F)$  be a (connected) T-net.  $\mathbf{J}$  is a T-invariant of  $N$  iff  $\mathbf{J}=[k \dots k]$  for some value  $k$

(the proof is dual to the analogous proposition for S-invariants of S-nets)

# Boundedness in strongly connected T-systems

**Lemma:** If a T-system  $(N, M_0)$  is strongly connected, then it is bounded

Let  $\Gamma$  be the set of the circuits of  $N$  and let  $k = \max_{\gamma \in \Gamma} M_0(\gamma)$ .

Since  $N$  is strongly connected, every place  $p$  belongs to some circuit  $\gamma_p$ .

By the fundamental property of T-systems: token count of  $\gamma_p$  is invariant.

Thus, for any reachable marking  $M$ , we have  $M(p) \leq M(\gamma_p) = M_0(\gamma_p) \leq k$ .  
Hence the net is  $k$ -bounded.

# Safeness in strongly connected T-systems

**Corollary:** If a T-system  $(N, M_0)$  is strongly connected and  $M_0(P)=1$ , then it is safe

Let  $\Gamma$  be the set of the circuits of  $N$  and let  $k = \max_{\gamma \in \Gamma} M_0(\gamma) = 1$

Since  $N$  is strongly connected, every place  $p$  belongs to some circuit  $\gamma_p$ .

By the fundamental property of T-systems: token count of  $\gamma_p$  is invariant.

Thus, for any reachable marking  $M$ , we have  $M(p) \leq M(\gamma_p) = M_0(\gamma_p) \leq k$ .  
Hence the net is  $k$ -bounded. = 1

# Safeness in strongly connected T-systems

**Corollary:** If a T-system  $(N, M_0)$  is strongly connected and for any circuit  $\gamma$   $M_0(\gamma) \leq 1$ , then it is safe

Let  $\Gamma$  be the set of the circuits of  $N$  and let  $k = \max_{\gamma \in \Gamma} M_0(\gamma) \leq 1$

Since  $N$  is strongly connected, every place  $p$  belongs to some circuit  $\gamma_p$ .

By the fundamental property of T-systems: token count of  $\gamma_p$  is invariant.

Thus, for any reachable marking  $M$ , we have  $M(p) \leq M(\gamma_p) = M_0(\gamma_p) \leq k$ .


Hence the net is  $k$ -bounded.

$\leq 1$




# Question time

Is the T-systems below bounded? (why?)

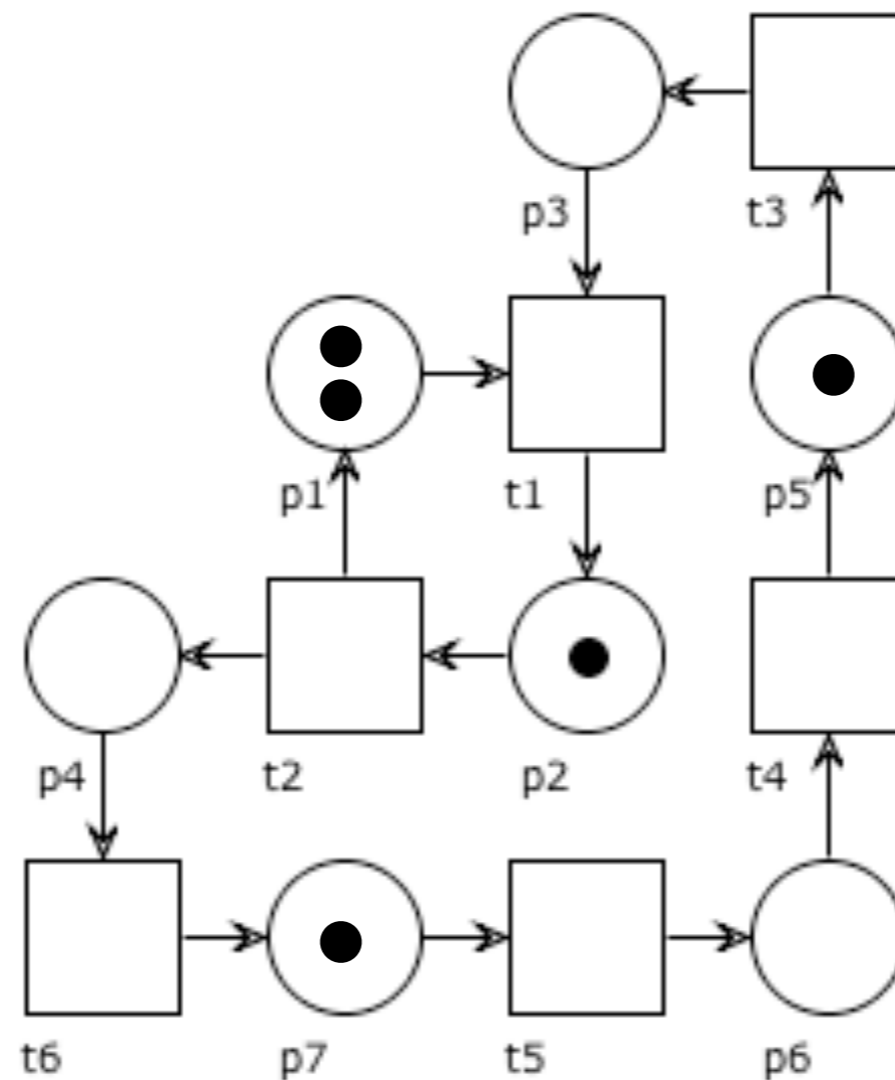

# Question time


Is the T-systems below bounded? (why?)

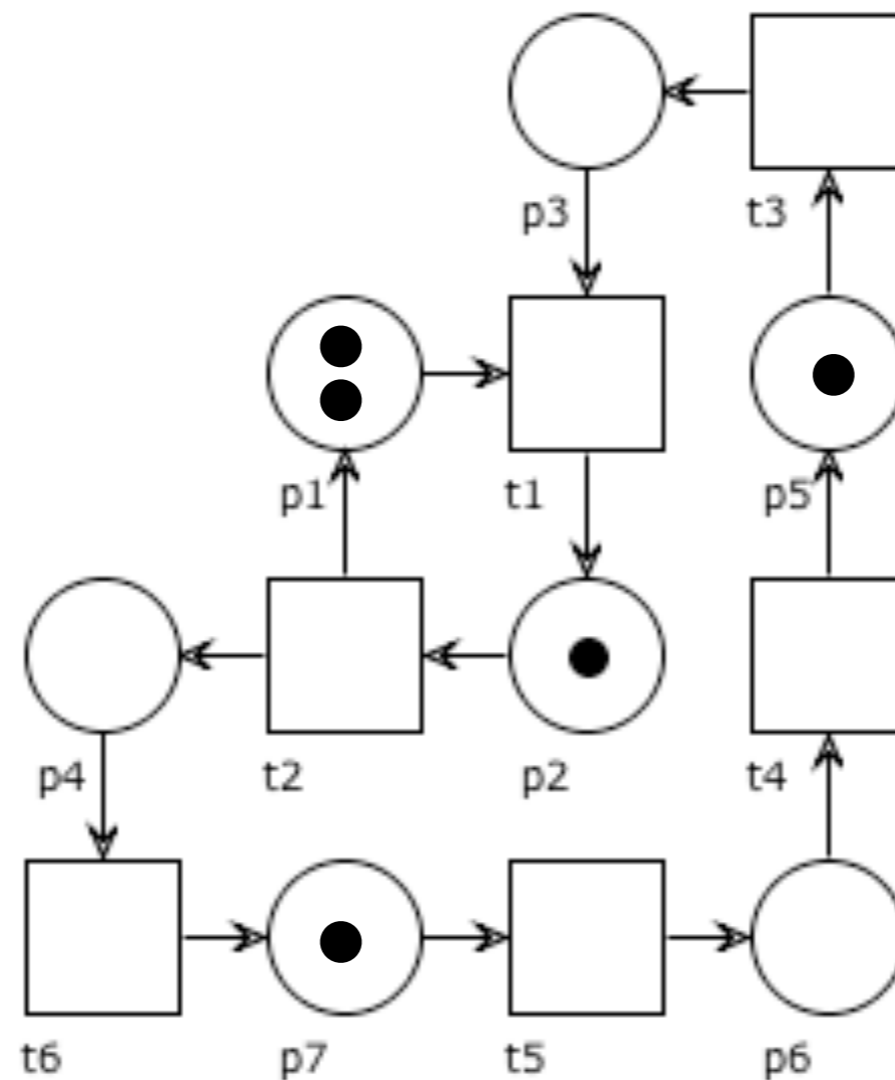

Strongly connected  
=> bounded


# Question time

Is the T-systems below safe? (why?)

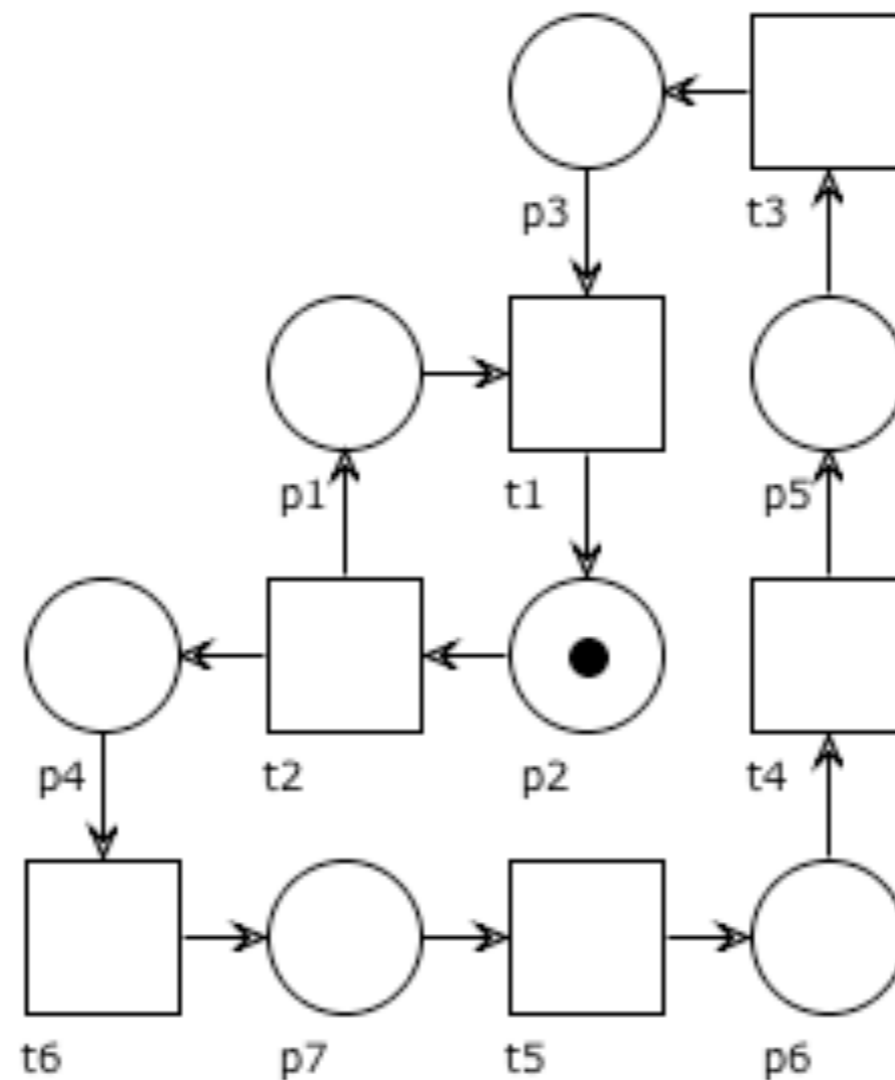

# Question time


Is the T-systems below safe? (why?)

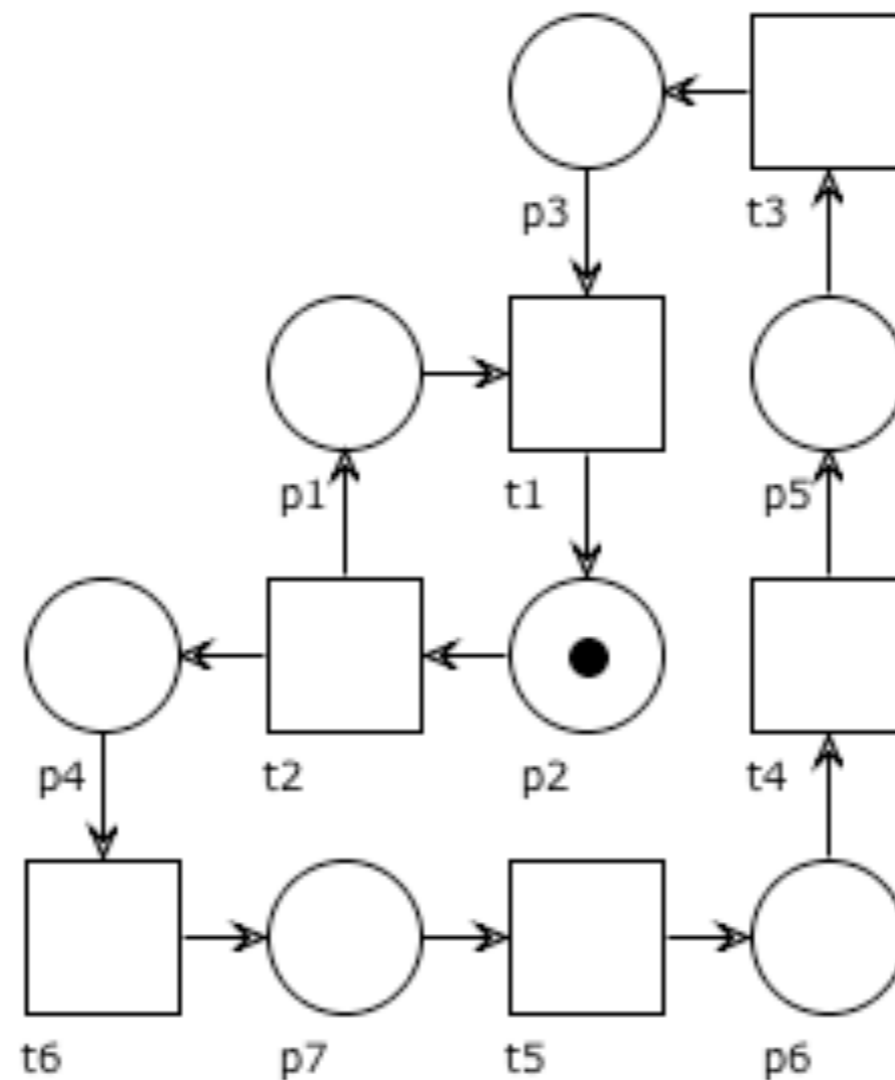

Strongly connected  
+  $M_0(P)=1$   
=> safe


# Question time

Is the T-systems below safe? (why?)

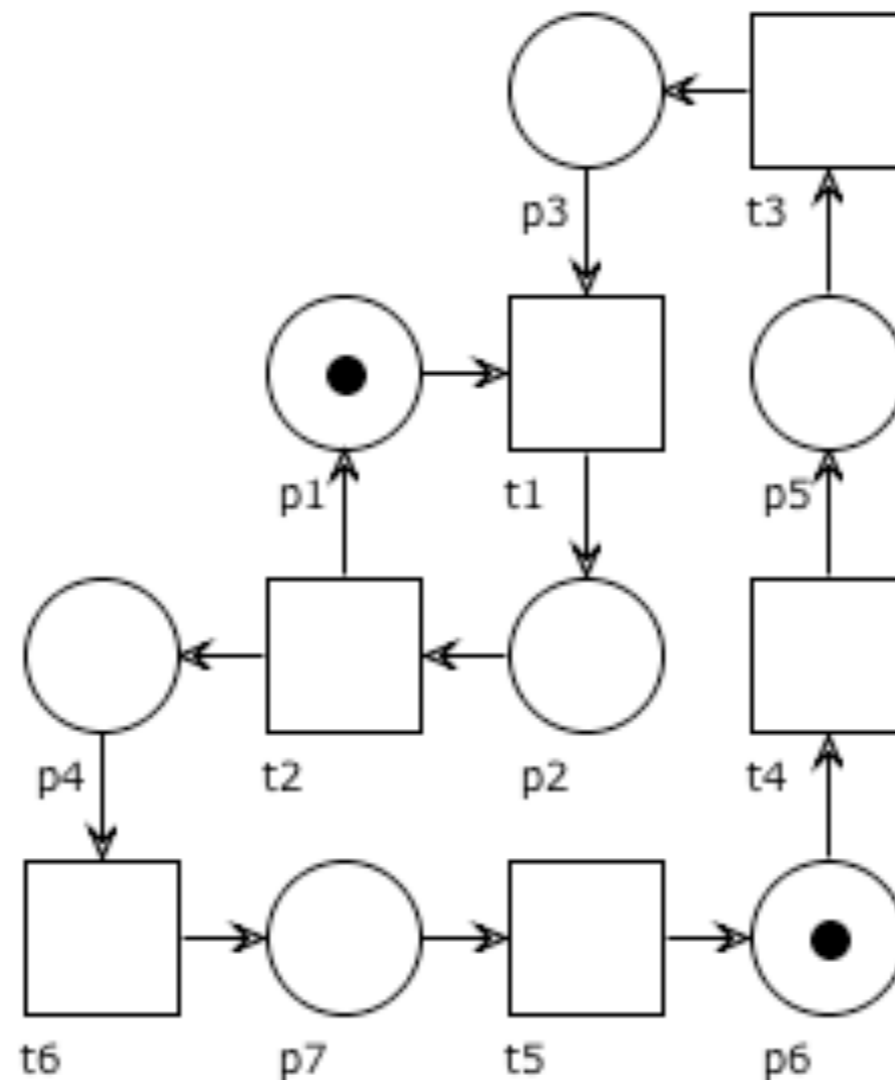

# Question time

Is the T-systems below safe? (why?)

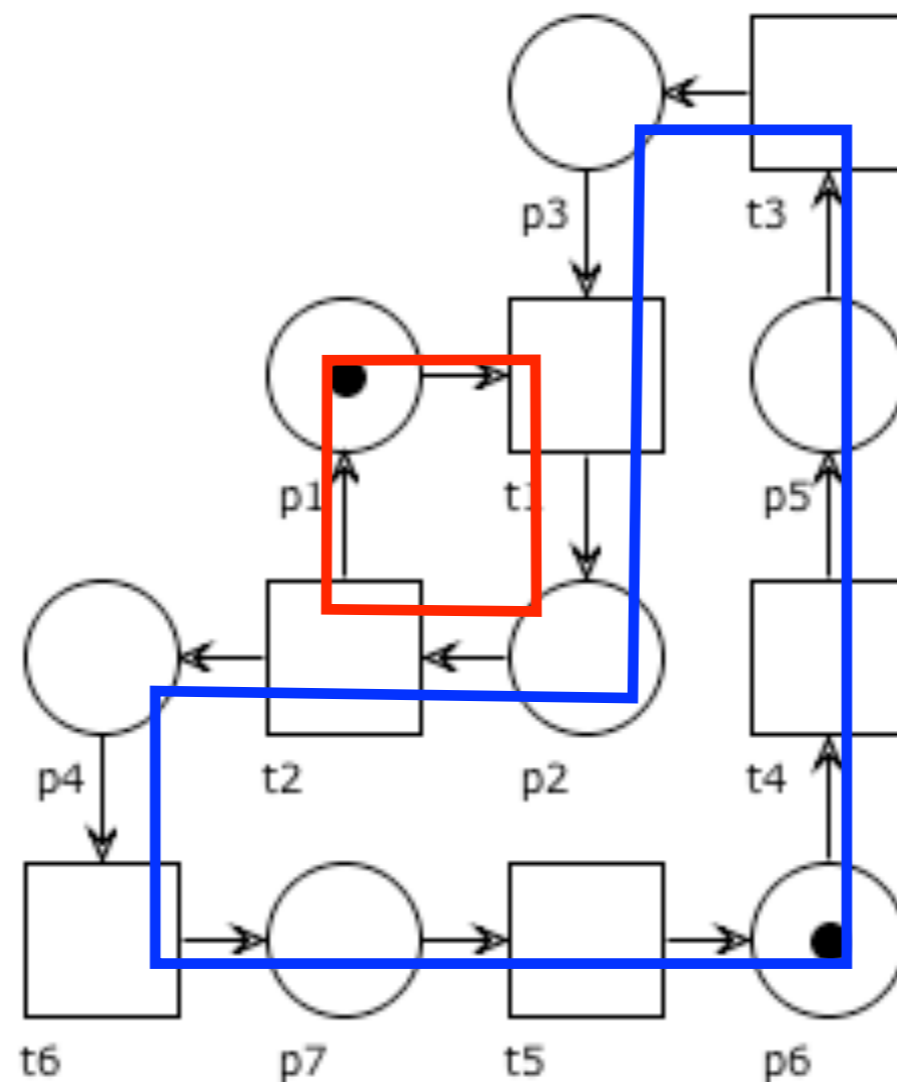

Strongly connected  
+  $\forall \gamma . M_0(\gamma) \leq 1$   
 $\Rightarrow$  safe

# Liveness theorem for T-systems

**Theorem:** A T-system  $(N, M_0)$  is live  
**iff** every circuit of  $N$  is marked at  $M_0$

$\Rightarrow$ ) (quite obvious)

By contradiction, let  $\gamma$  be a circuit with  $M_0(\gamma) = 0$ .

By the fundamental property of T-systems:  $\forall M \in [M_0 \rangle, M(\gamma) = 0$ .

Take any  $t \in T|_\gamma$  and  $p \in P|_\gamma \cap \bullet t$ .

For any  $M \in [M_0 \rangle$ , we have  $M(p) = 0$ .

Hence  $t$  is never enabled and the T-system is not live.

# Liveness theorem for T-systems

**Theorem:** A T-system  $(N, M_0)$  is live  
**iff** every circuit of  $N$  is marked at  $M_0$

$\Leftarrow$ ) (more involved)

Take any  $t \in T$  and  $M \in [M_0 \rangle$ .

We need to show that some marking  $M'$  reachable from  $M$  enables  $t$ .

The key idea is to collect the places that control the firing of  $t$ :

$p \in P_{M,t}$  if there is a path from  $p$  to  $t$  through places unmarked at  $M$ .




We then proceed by induction on the size of  $P_{M,t}$ .

Rest of the proof left to  
your ingenuity




# Question time

Which of the T-systems below is live? (why?)

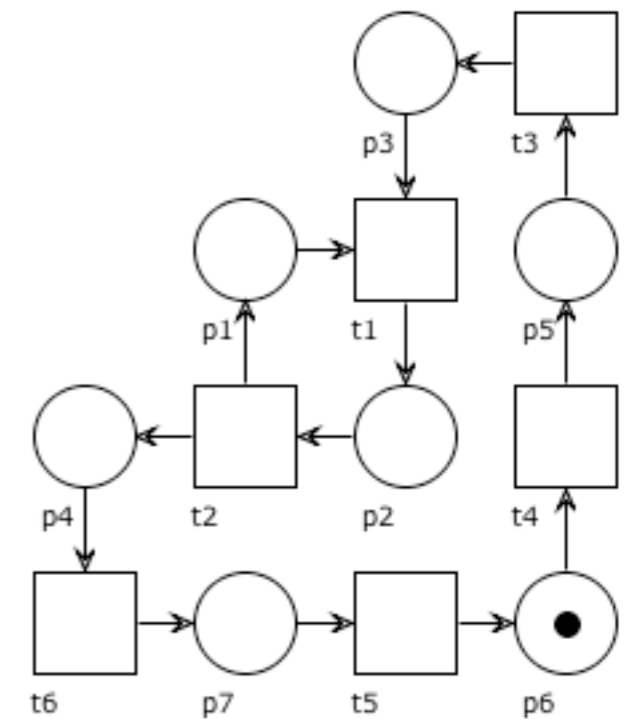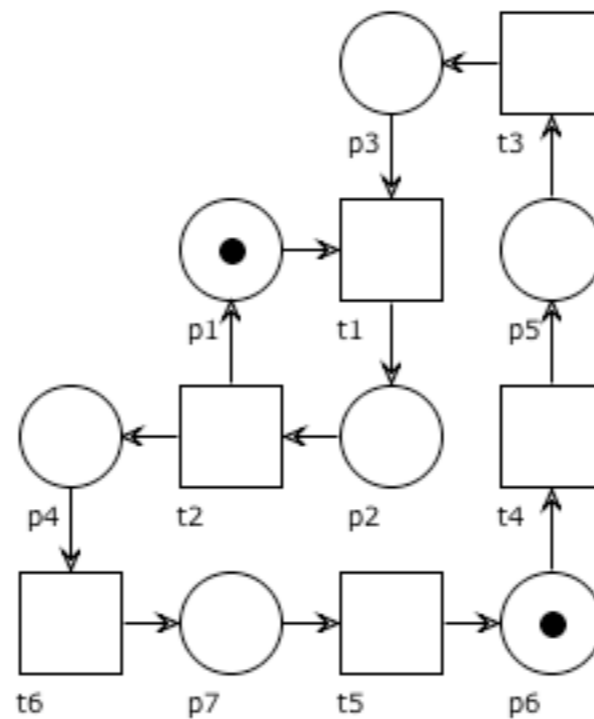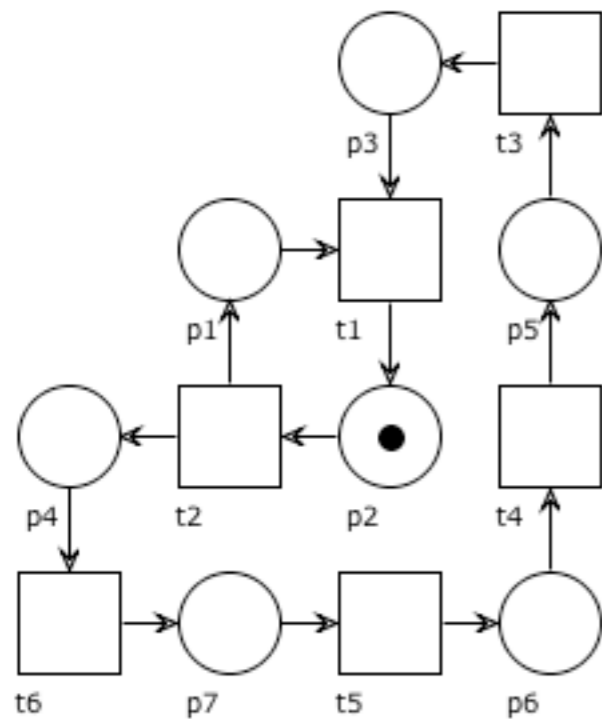


# Question time


Which of the T-systems below is live? (why?)

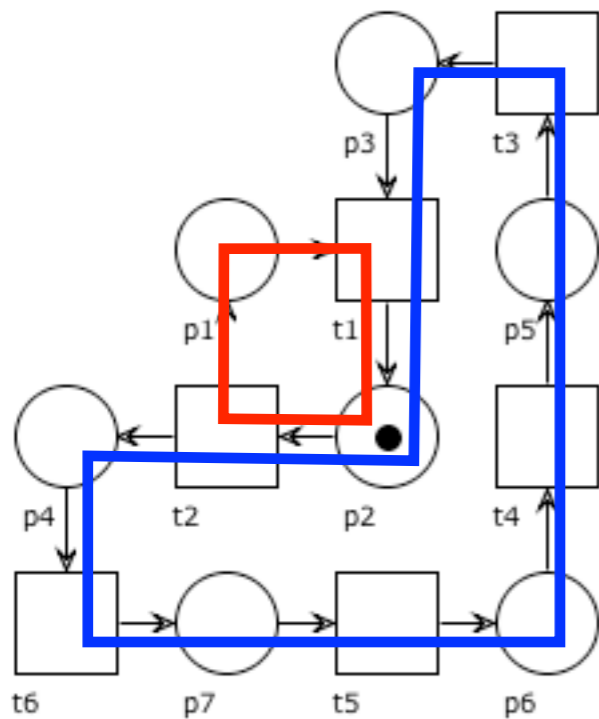

Both circuits are marked  
=> live

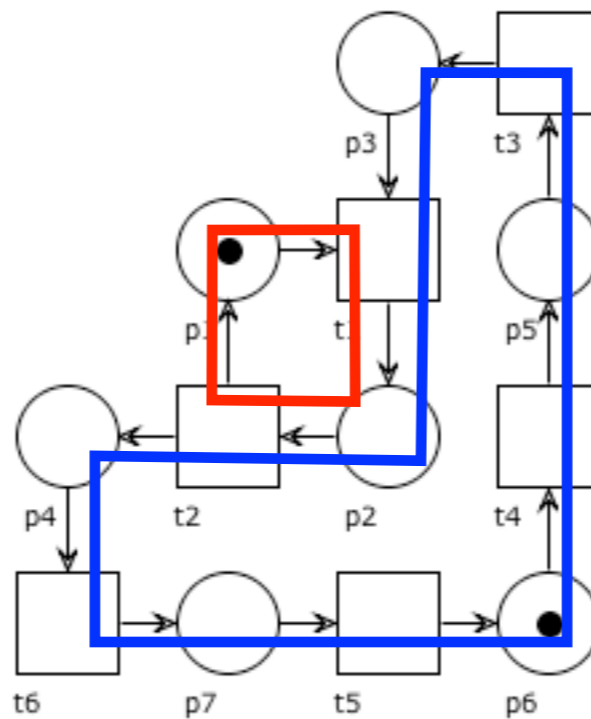

Both circuits are marked  
=> live

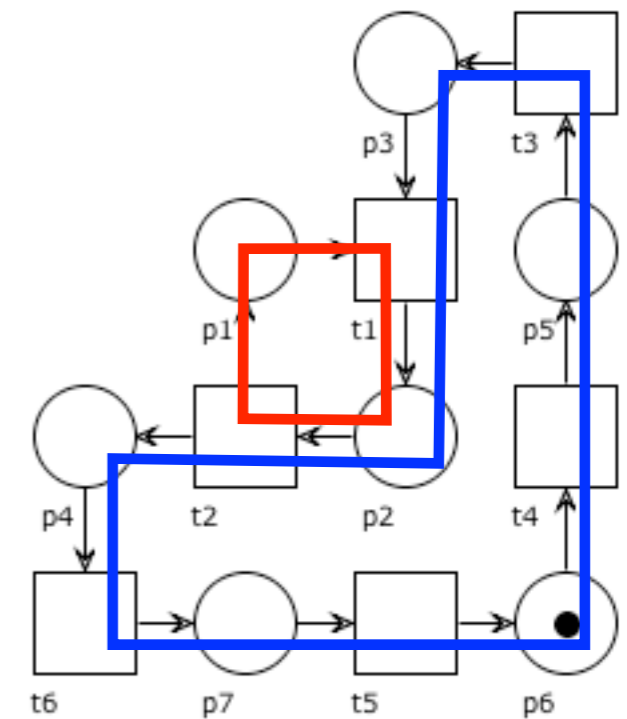

red circuit is not marked  
=> not live

# T-systems: recap

T-system +  $\gamma$  circuit + M reachable  $\Rightarrow M(\gamma) = M_0(\gamma)$

T-system +  $\gamma$  circuit +  $M(\gamma) \neq M_0(\gamma) \Rightarrow M$  not reachable

T-system +  $\gamma_1 \dots \gamma_n$  circuits:  $\exists i. p \in \gamma_i \Leftrightarrow p$  bounded

T-system:  $M_0(\gamma) > 0$  for all circuits  $\gamma \Leftrightarrow$  live

T-system: strongly connected  $\Rightarrow$  bounded

**T-system + live: strongly connected  $\Leftrightarrow$  bounded**

T-system: T-invariant  $\mathbf{J} \Leftrightarrow \mathbf{J} = [k \ k \ \dots \ k]$

# Consequences on workflow nets

**Theorem:** If  $N$  is a workflow net s.t.  $N^*$  is a T-system then  
 $N$  is safe and sound **iff**  
every circuit of  $N^*$  is marked

$N$  workflow net  $\Rightarrow N^*$  strongly connected

$N^*$  strongly connected + T-system  $\Rightarrow N^*$  bounded

$N^*$  strongly connected + T-system +  $M_0(P)=1 \Rightarrow N^*$  safe

every circuits of  $N^*$  is marked  $\Leftrightarrow N^*$  live


# Exercises

Which are the circuits of the T-system below?

Is the T-system below live? (why?)


Which places are bounded? (why?)

Assign a bound to each bounded place.

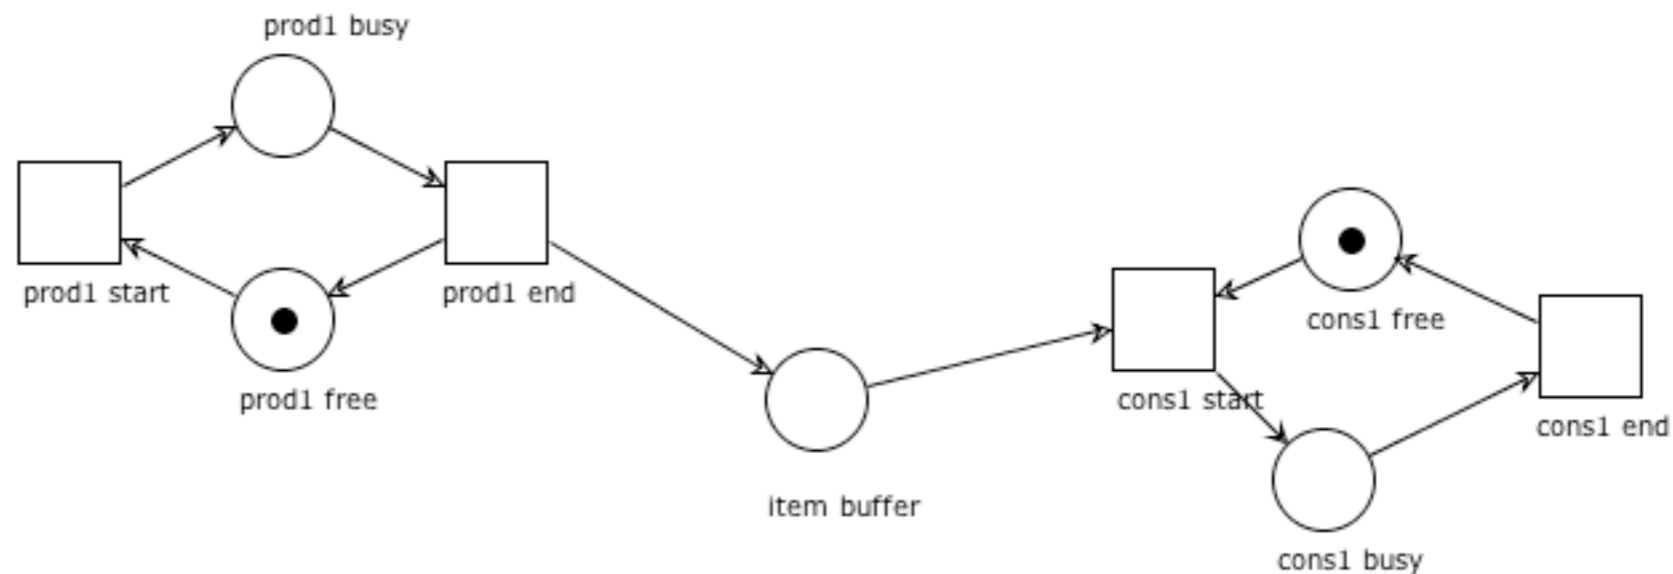

# Exercise

Is the workflow net  $N$  below a T-net?  
Is it sound?

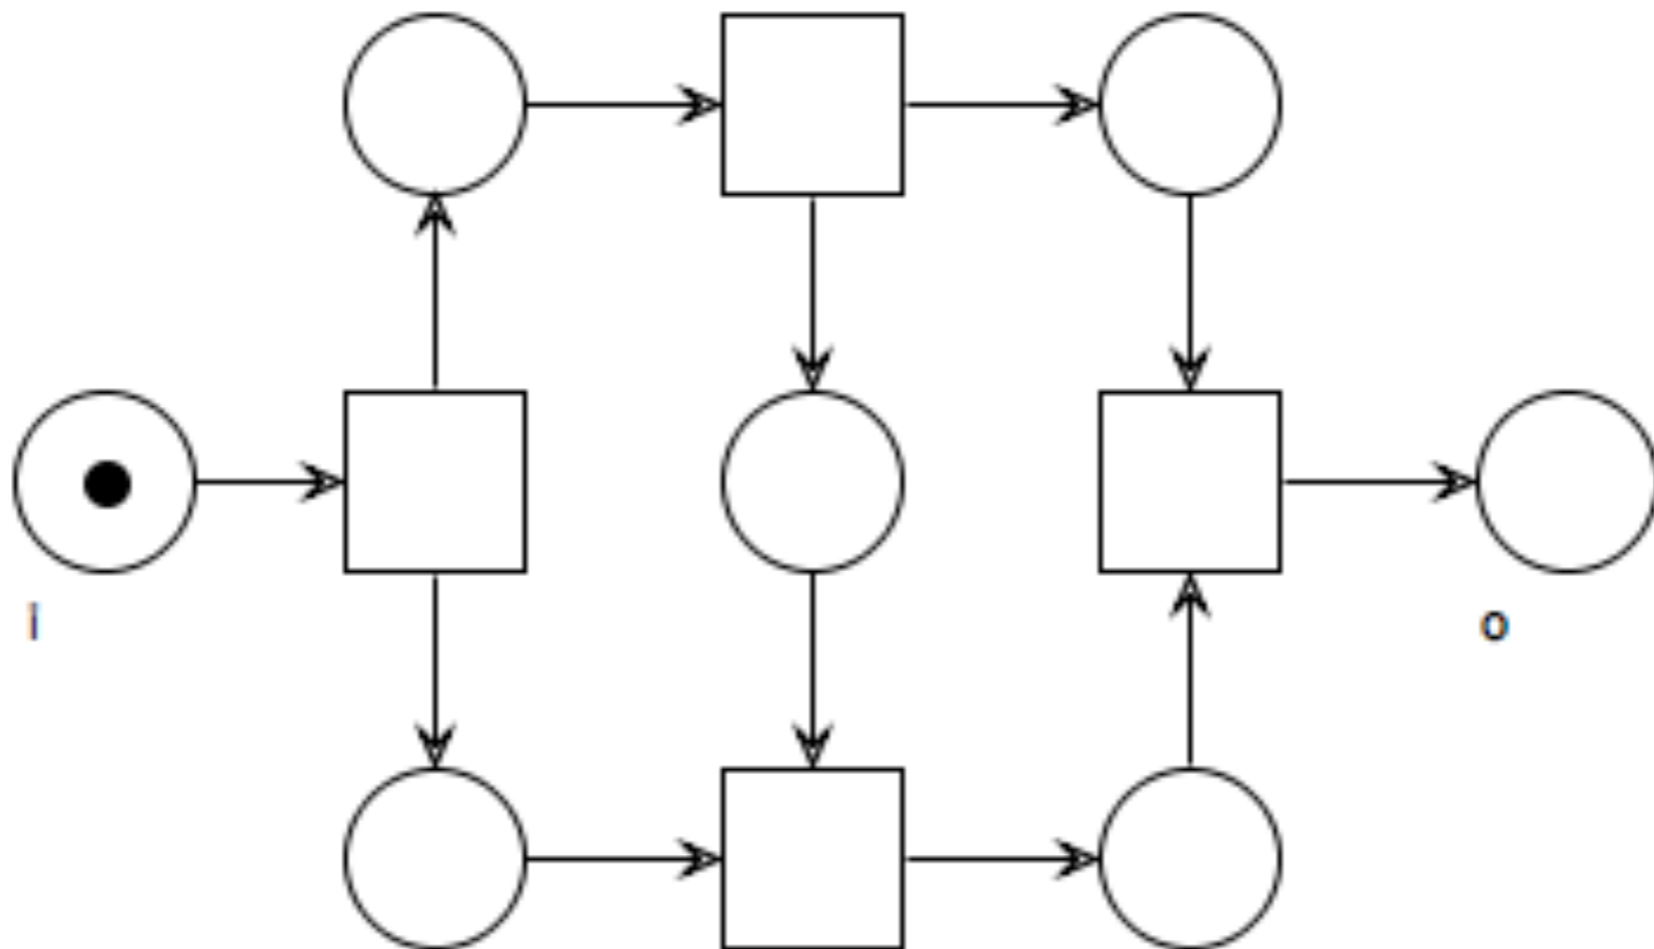

# Exercise

Is the workflow net below a T-net?  
Is it sound?

