

DATA MINING 1

Hierarchical Clustering



Dino Pedreschi, Riccardo Guidotti

Revisited slides from Lecture Notes for Chapter 7 “Introduction to Data Mining”, 2nd Edition by Tan, Steinbach, Karpatne, Kumar




Hierarchical Clustering


- Produces a set of nested clusters organized as a hierarchical tree
- Can be visualized as a dendrogram
 - A tree like diagram that records the sequences of merges or splits

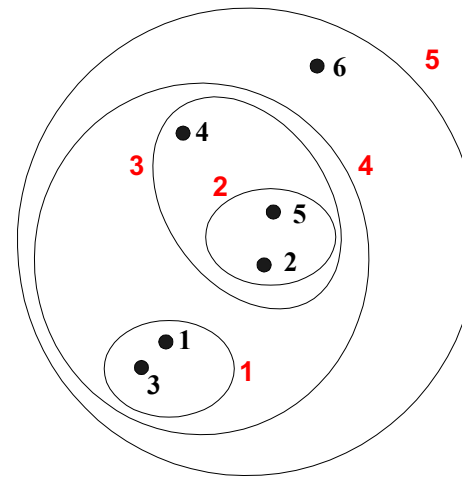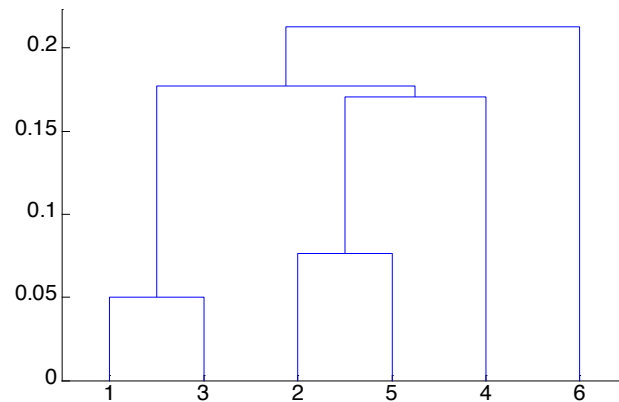



Dendrograms

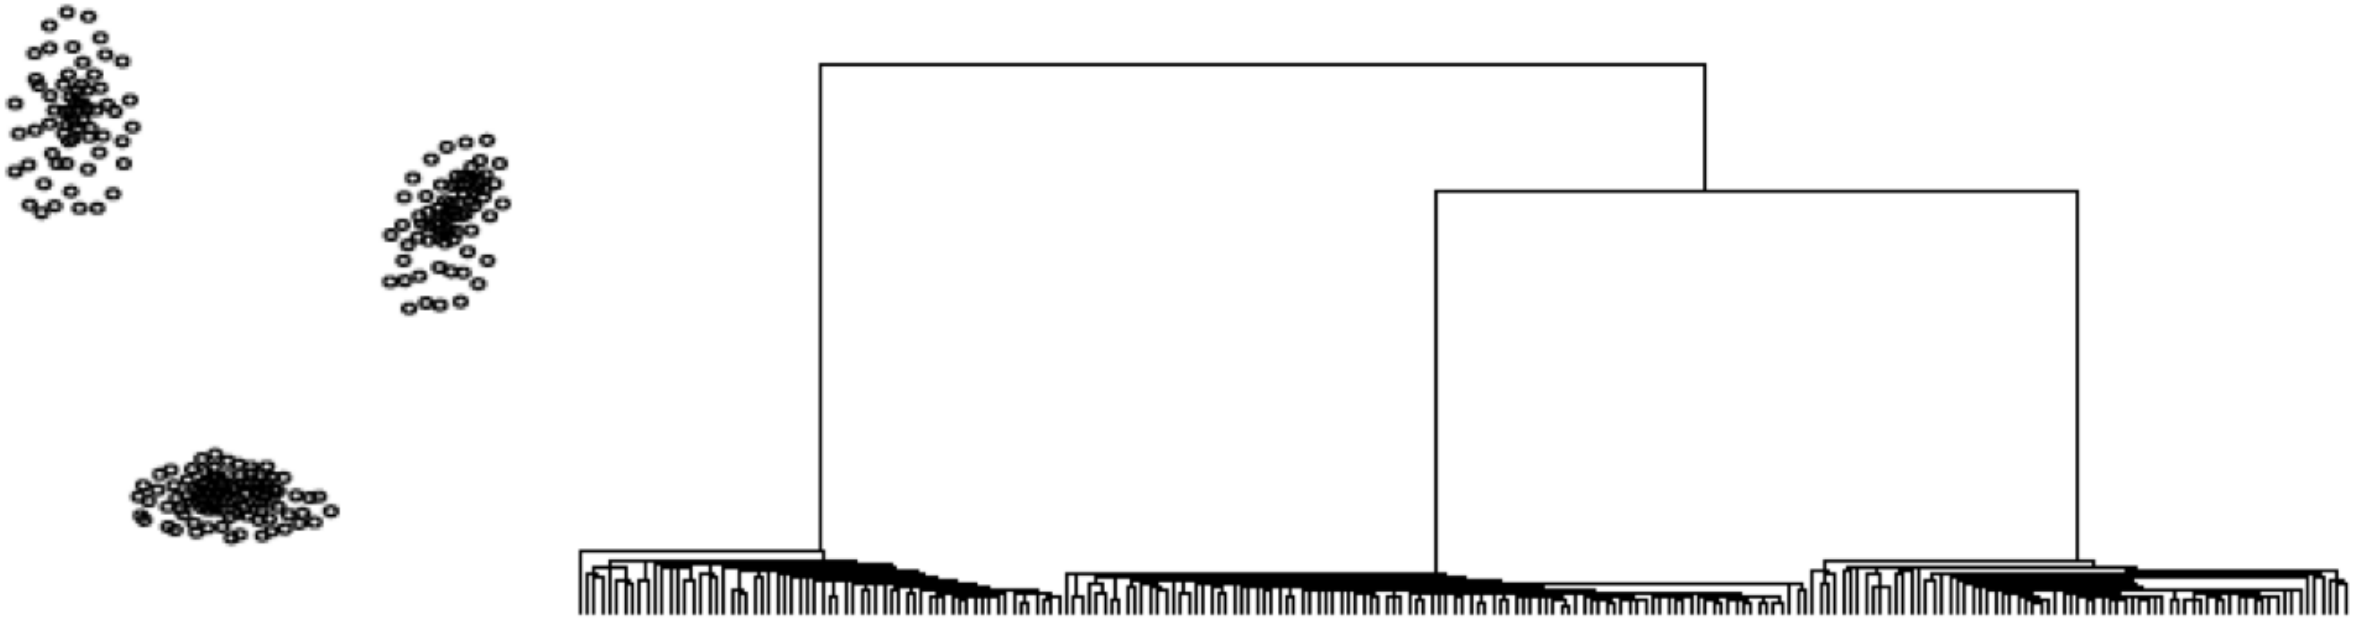

Dendrograms

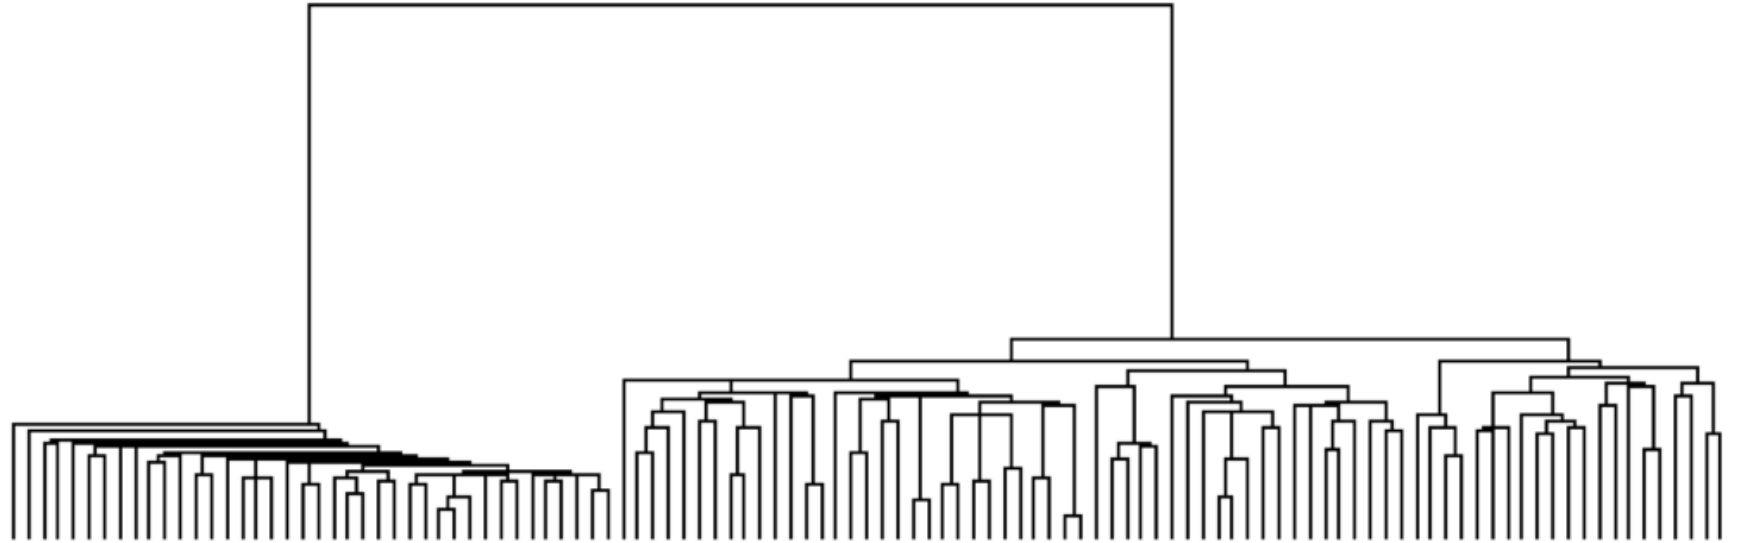

Dendrograms

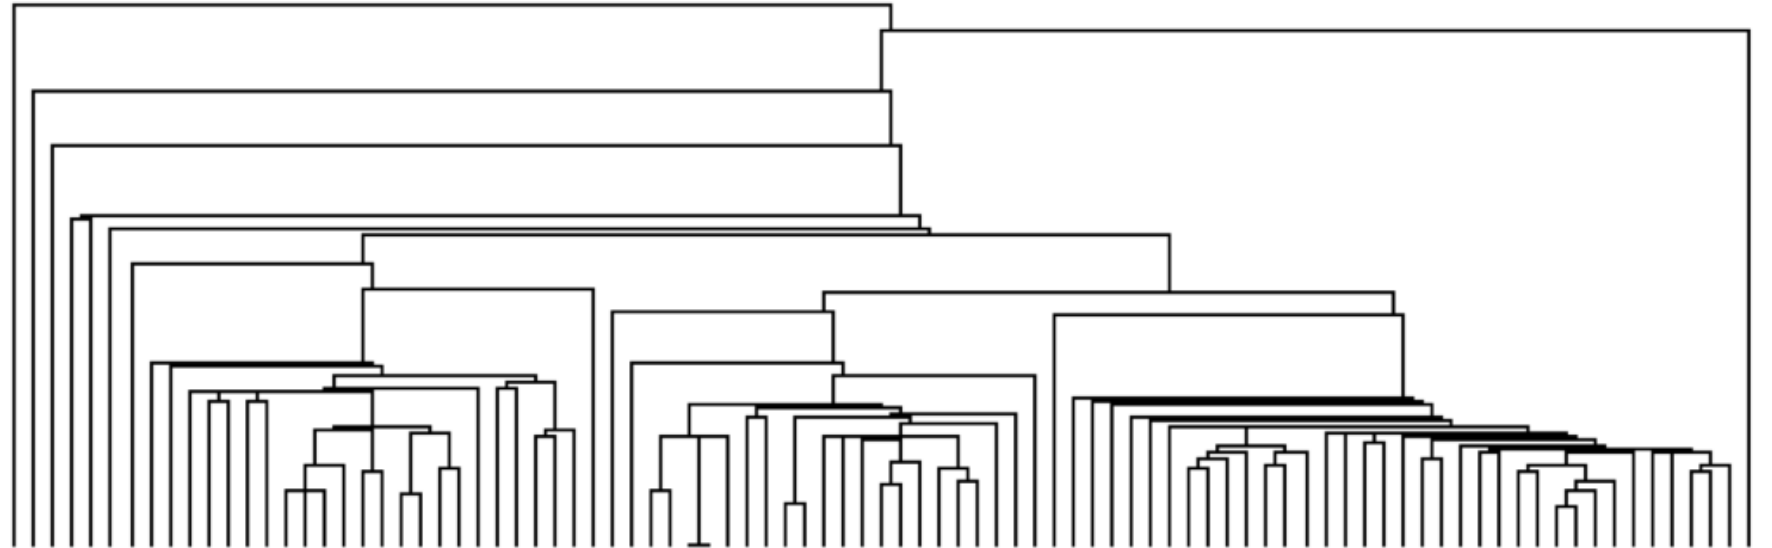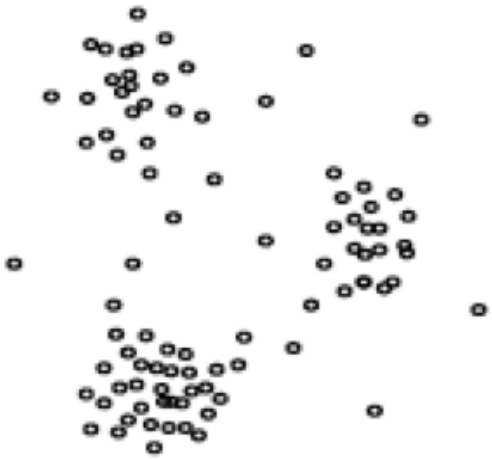

Strengths of Hierarchical Clustering

- Do not have to assume any particular number of clusters
 - Any desired number of clusters can be obtained by 'cutting' the dendrogram at the proper level
- They may correspond to meaningful taxonomies
 - Example in biological sciences (e.g., animal kingdom, phylogeny reconstruction, ...)

Hierarchical Clustering


- Two main types of hierarchical clustering
 - Agglomerative:
 - Start with the points as individual clusters
 - At each step, merge the closest pair of clusters until only one cluster (or k clusters) left
 - Divisive:
 - Start with one, all-inclusive cluster
 - At each step, split a cluster until each cluster contains an individual point (or there are k clusters)
- Traditional hierarchical algorithms use a similarity or distance matrix
 - Merge or split one cluster at a time

Agglomerative Clustering Algorithm

- Most popular hierarchical clustering technique
- Basic algorithm is straightforward
 1. Compute the proximity matrix
 2. Let each data point be a cluster
 3. **Repeat**
 4. Merge the two closest clusters
 5. Update the proximity matrix
 6. **Until** only a single cluster remains
- Key operation is the computation of the proximity of two clusters
 - Different approaches to defining the distance between clusters distinguish the different algorithms


Starting Situation

- Start with clusters of individual points and a proximity matrix

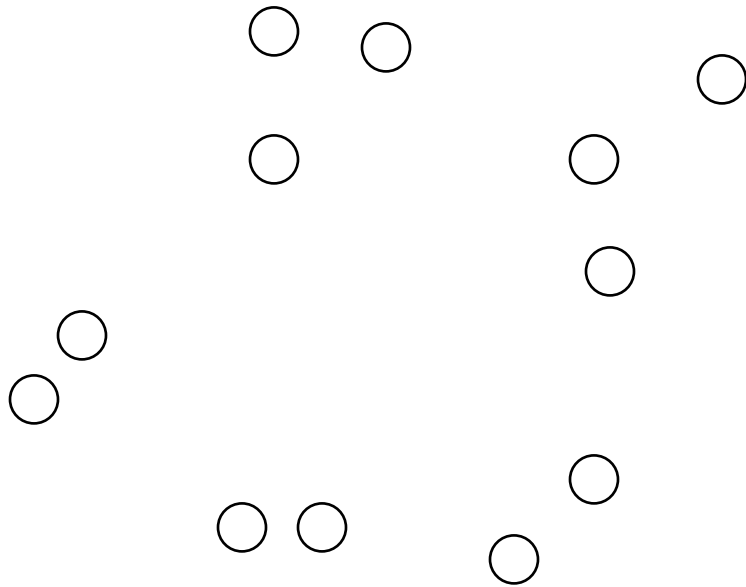


| | p1 | p2 | p3 | p4 | p5 | ... |
|----|----|----|----|----|----|-----|
| p1 | | | | | | |
| p2 | | | | | | |
| p3 | | | | | | |
| p4 | | | | | | |
| p5 | | | | | | |
| . | | | | | | |
| . | | | | | | |
| . | | | | | | |

Proximity Matrix




Intermediate Situation

- After some merging steps, we have some clusters

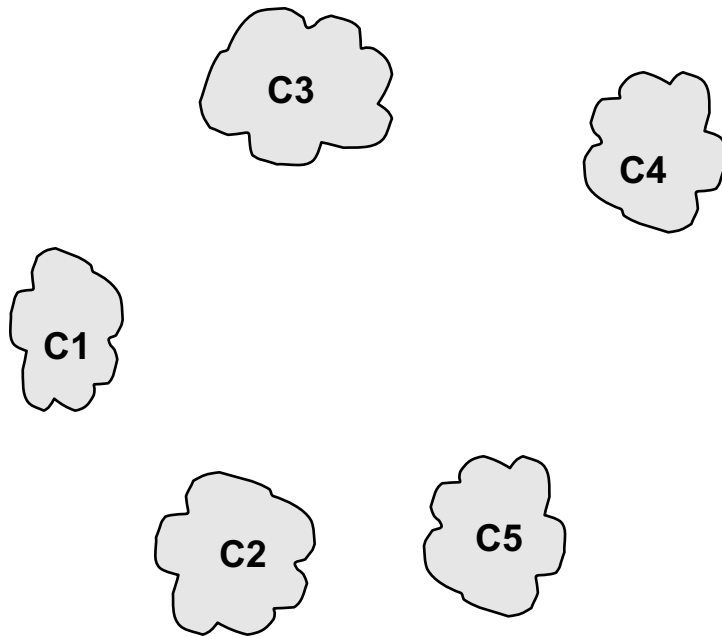


| | C1 | C2 | C3 | C4 | C5 |
|----|----|----|----|----|----|
| C1 | | | | | |
| C2 | | | | | |
| C3 | | | | | |
| C4 | | | | | |
| C5 | | | | | |

Proximity Matrix

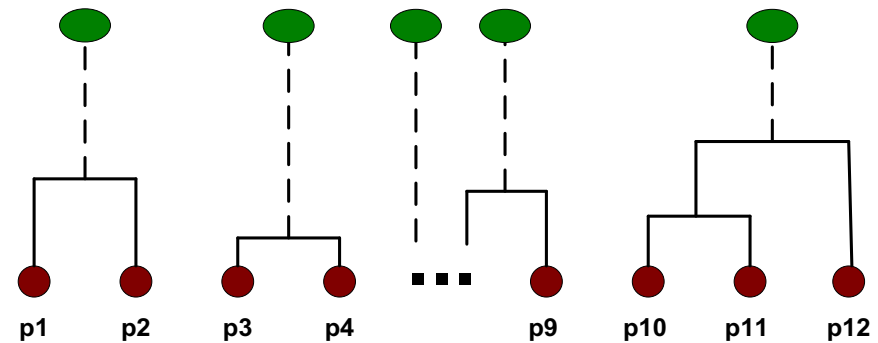


Intermediate Situation

- We want to merge the two closest clusters (C2 and C5) and update the proximity matrix.

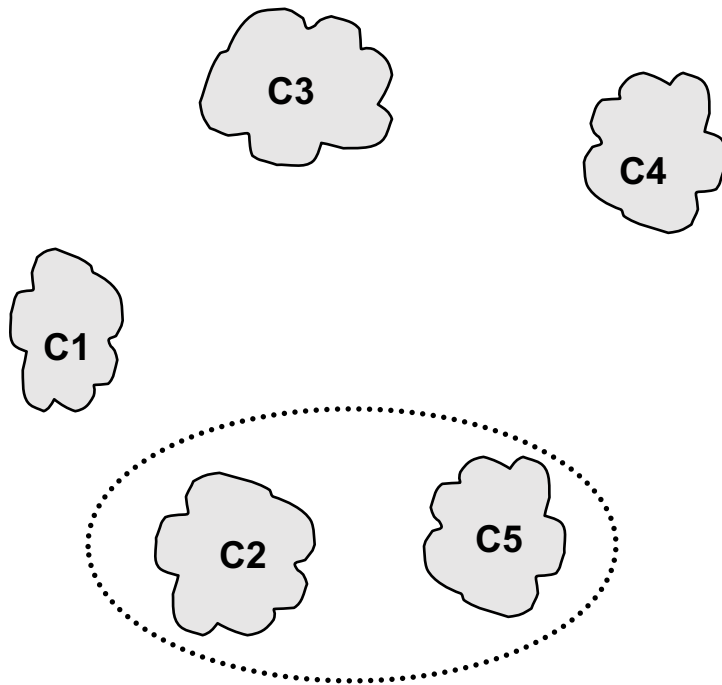


| | C1 | C2 | C3 | C4 | C5 |
|----|----|----|----|----|----|
| C1 | | | | | |
| C2 | | | | | |
| C3 | | | | | |
| C4 | | | | | |
| C5 | | | | | |

Proximity Matrix

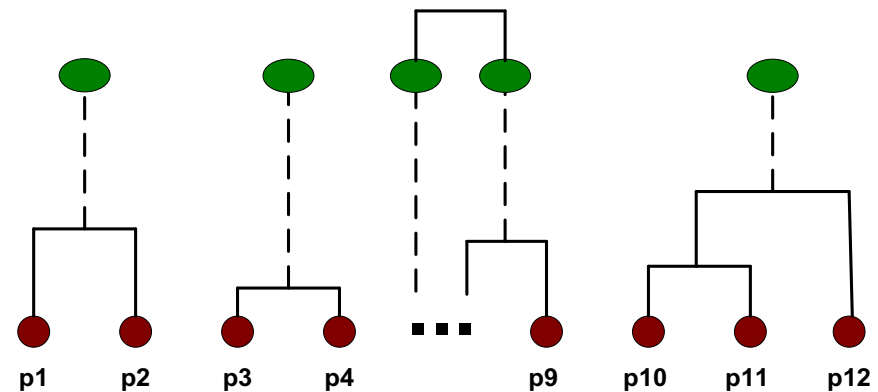


After Merging

- The question is “How do we update the proximity matrix?”

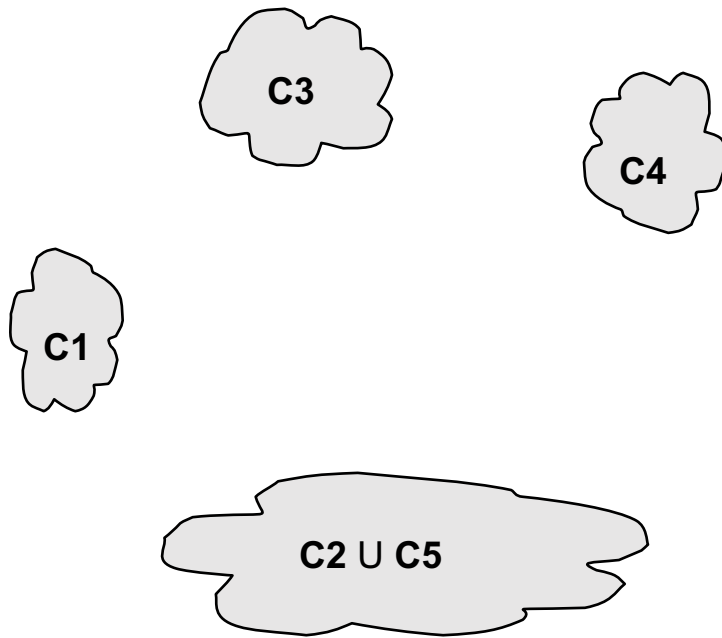


| | C1 | C2 U C5 | C3 | C4 |
|---------|----|---------------|----|----|
| C1 | | ? | | |
| C2 U C5 | ? | ? | ? | ? |
| C3 | | ? | | |
| C4 | | ? | | |

Proximity Matrix

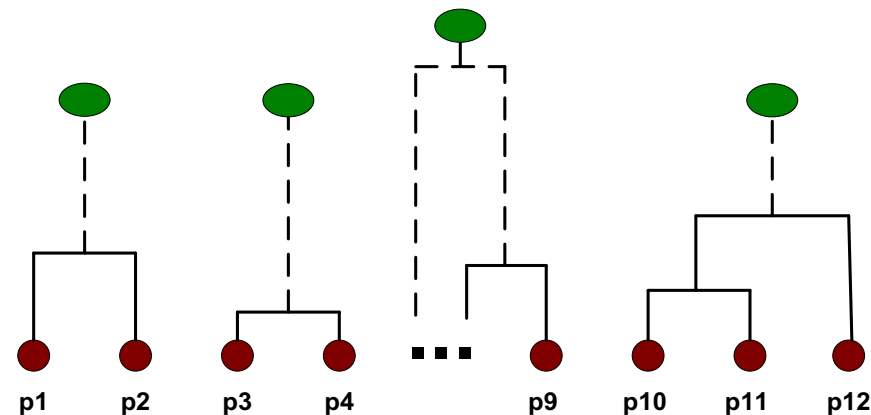

How to Define Inter-Cluster Distance

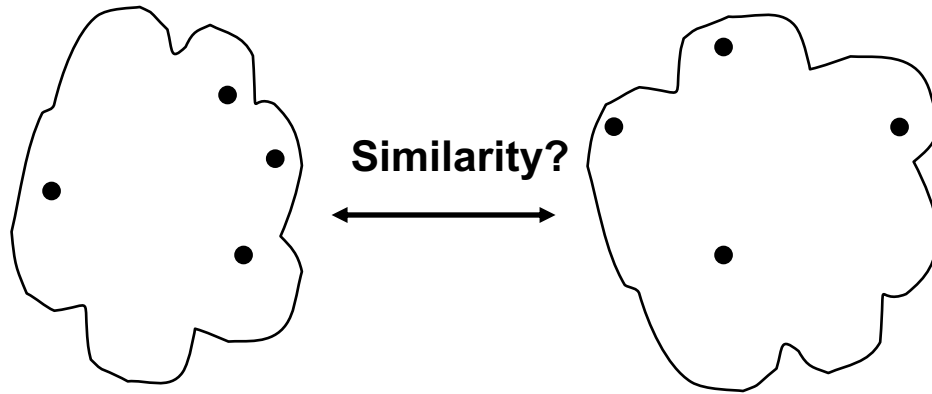


- MIN
- MAX
- Group Average
- Distance Between Centroids
- Other methods driven by an objective function
 - Ward's Method uses squared error

| | p1 | p2 | p3 | p4 | p5 | ... |
|----|----|----|----|----|----|-----|
| p1 | | | | | | |
| p2 | | | | | | |
| p3 | | | | | | |
| p4 | | | | | | |
| p5 | | | | | | |
| . | | | | | | |
| . | | | | | | |
| . | | | | | | |

Proximity Matrix

How to Define Inter-Cluster Similarity

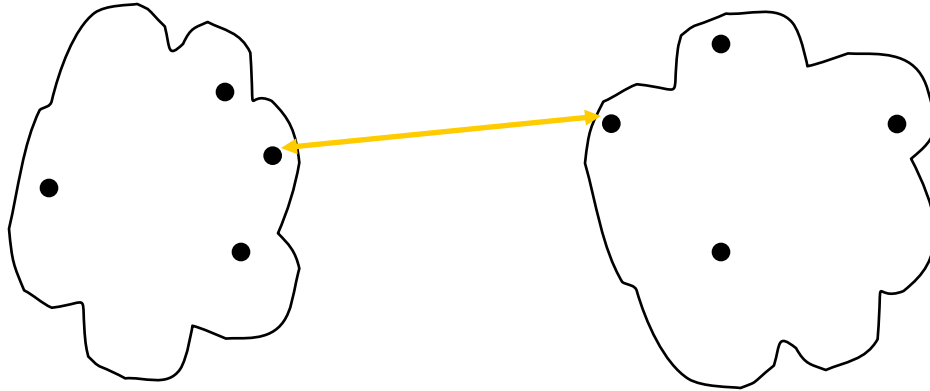


- **MIN**
- **MAX**
- **Group Average**
- **Distance Between Centroids**
- **Other methods driven by an objective function**
 - Ward's Method uses squared error

| | p1 | p2 | p3 | p4 | p5 | ... |
|----|----|----|----|----|----|-----|
| p1 | | | | | | |
| p2 | | | | | | |
| p3 | | | | | | |
| p4 | | | | | | |
| p5 | | | | | | |
| . | | | | | | |
| . | | | | | | |
| . | | | | | | |

Proximity Matrix

How to Define Inter-Cluster Similarity

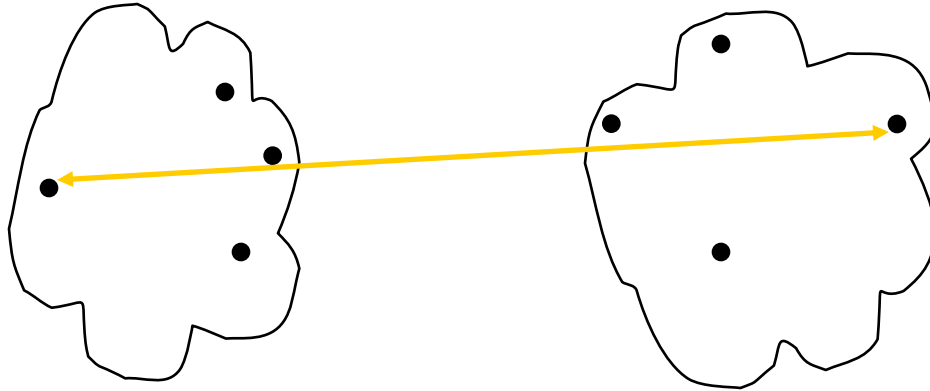


- MIN
- MAX
- Group Average
- Distance Between Centroids
- Other methods driven by an objective function
 - Ward's Method uses squared error

| | p1 | p2 | p3 | p4 | p5 | ... |
|----|----|----|----|----|----|-----|
| p1 | | | | | | |
| p2 | | | | | | |
| p3 | | | | | | |
| p4 | | | | | | |
| p5 | | | | | | |
| . | | | | | | |
| . | | | | | | |
| . | | | | | | |

Proximity Matrix

How to Define Inter-Cluster Similarity

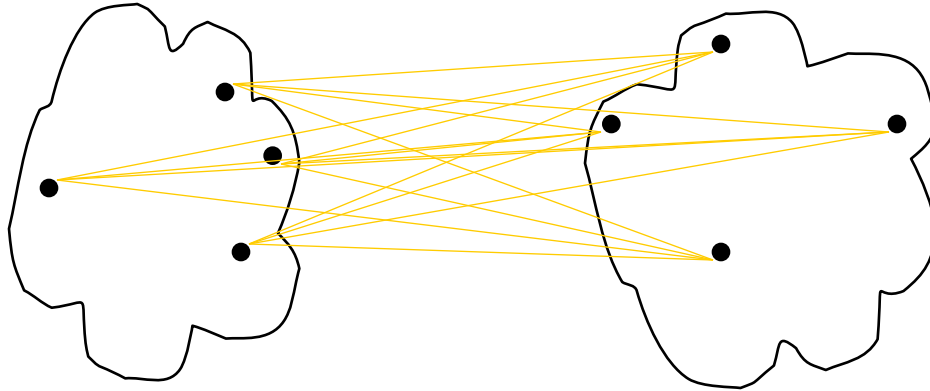


- MIN
- MAX
- **Group Average**
- Distance Between Centroids
- Other methods driven by an objective function
 - Ward's Method uses squared error

| | p1 | p2 | p3 | p4 | p5 | ... |
|----|----|----|----|----|----|-----|
| p1 | | | | | | |
| p2 | | | | | | |
| p3 | | | | | | |
| p4 | | | | | | |
| p5 | | | | | | |
| . | | | | | | |
| . | | | | | | |
| . | | | | | | |

Proximity Matrix

How to Define Inter-Cluster Similarity

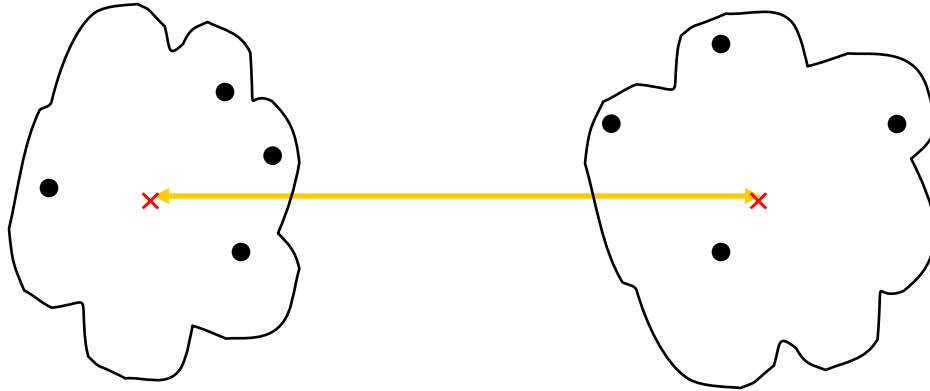


- MIN
- MAX
- Group Average
- **Distance Between Centroids**
- Other methods driven by an objective function
 - Ward's Method uses squared error

| | p1 | p2 | p3 | p4 | p5 | ... |
|----|----|----|----|----|----|-----|
| p1 | | | | | | |
| p2 | | | | | | |
| p3 | | | | | | |
| p4 | | | | | | |
| p5 | | | | | | |
| . | | | | | | |
| . | | | | | | |
| . | | | | | | |

Proximity Matrix

MIN or Single Link


- Proximity of two clusters is based on the two closest points in the different clusters
 - Determined by one pair of points, i.e., by one link in the proximity graph
- Example:

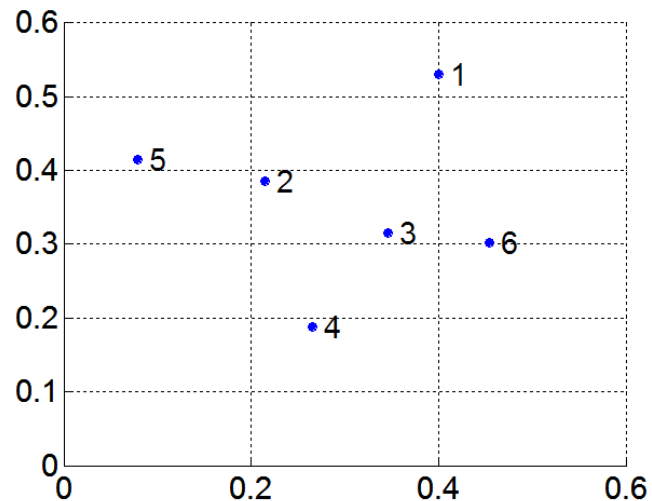


Distance Matrix:

| | p1 | p2 | p3 | p4 | p5 | p6 |
|----|------|------|------|------|------|------|
| p1 | 0.00 | 0.24 | 0.22 | 0.37 | 0.34 | 0.23 |
| p2 | 0.24 | 0.00 | 0.15 | 0.20 | 0.14 | 0.25 |
| p3 | 0.22 | 0.15 | 0.00 | 0.15 | 0.28 | 0.11 |
| p4 | 0.37 | 0.20 | 0.15 | 0.00 | 0.29 | 0.22 |
| p5 | 0.34 | 0.14 | 0.28 | 0.29 | 0.00 | 0.39 |
| p6 | 0.23 | 0.25 | 0.11 | 0.22 | 0.39 | 0.00 |

Hierarchical Clustering: MIN

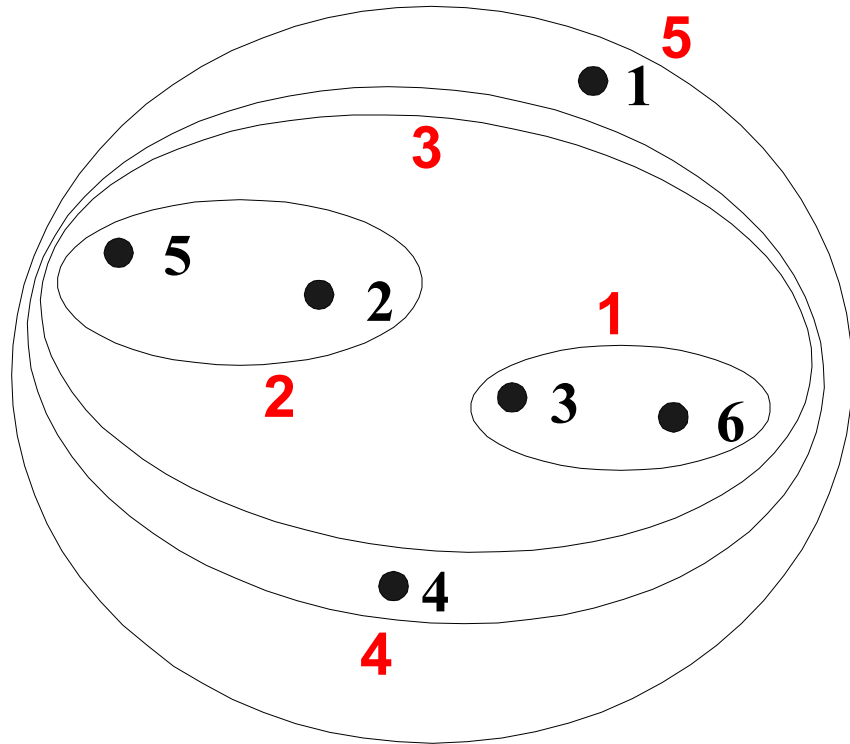


Nested Clusters

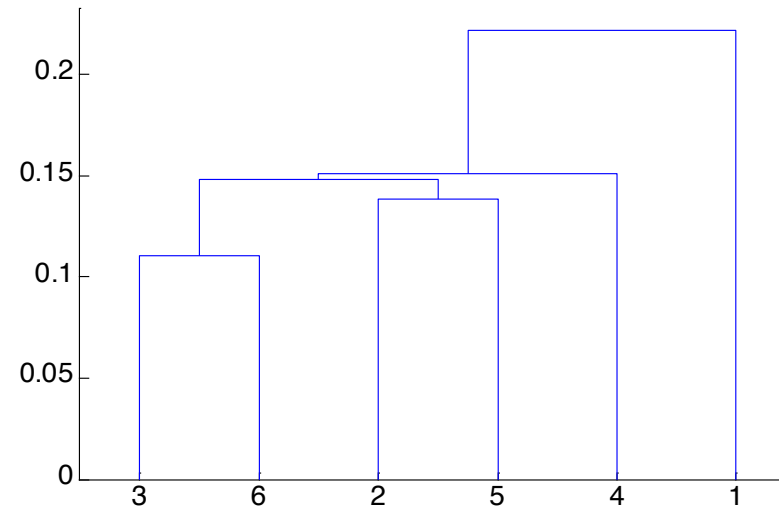


Dendrogram

Strength of MIN

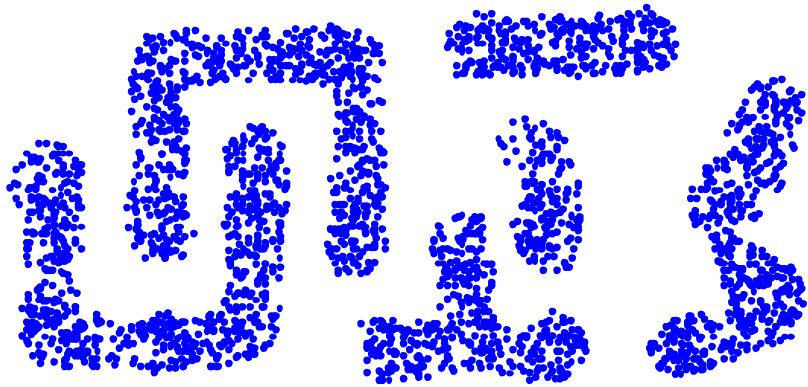


Original Points

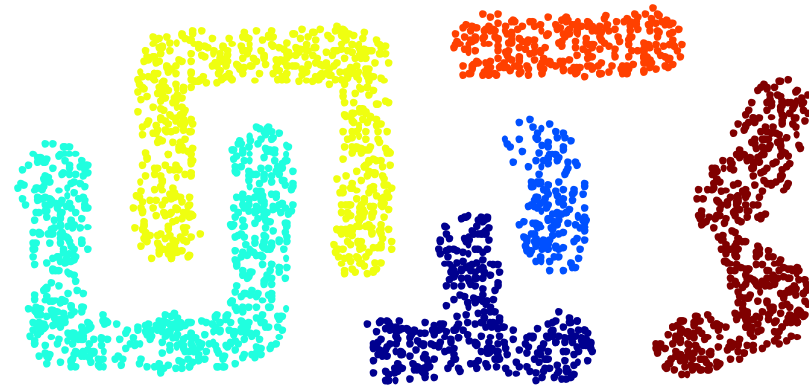

Six Clusters


- Can handle non-elliptical shapes

Limitations of MIN

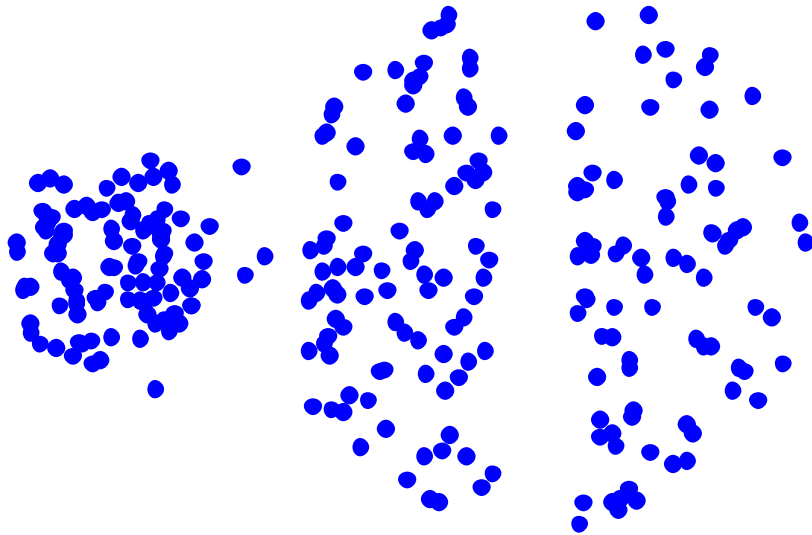


Original Points

- Sensitive to noise and outliers

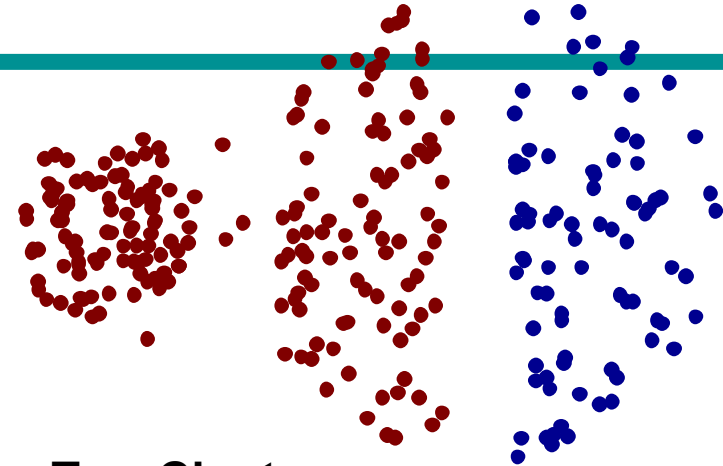


Two Clusters

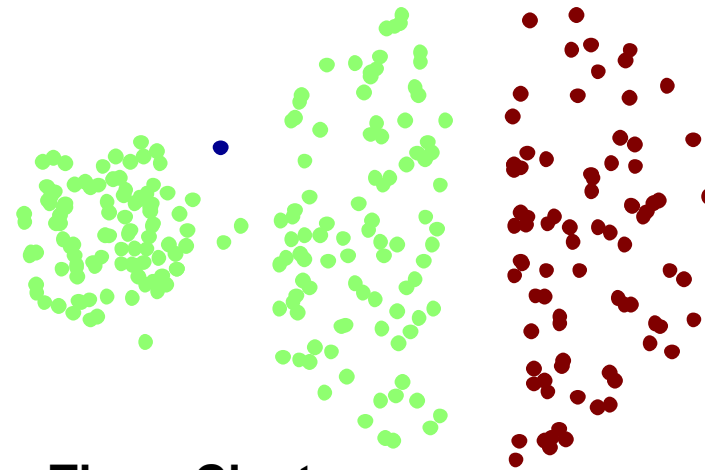

Three Clusters

MAX or Complete Linkage


- Proximity of two clusters is based on the two most distant points in the different clusters
 - Determined by all pairs of points in the two clusters

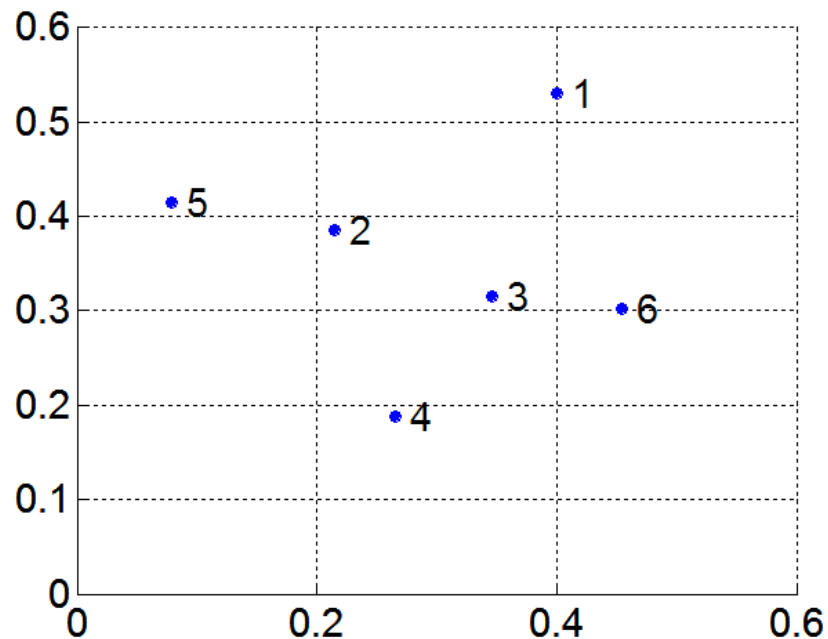


Distance Matrix:

| | p1 | p2 | p3 | p4 | p5 | p6 |
|----|------|------|------|------|------|------|
| p1 | 0.00 | 0.24 | 0.22 | 0.37 | 0.34 | 0.23 |
| p2 | 0.24 | 0.00 | 0.15 | 0.20 | 0.14 | 0.25 |
| p3 | 0.22 | 0.15 | 0.00 | 0.15 | 0.28 | 0.11 |
| p4 | 0.37 | 0.20 | 0.15 | 0.00 | 0.29 | 0.22 |
| p5 | 0.34 | 0.14 | 0.28 | 0.29 | 0.00 | 0.39 |
| p6 | 0.23 | 0.25 | 0.11 | 0.22 | 0.39 | 0.00 |

Hierarchical Clustering: MAX

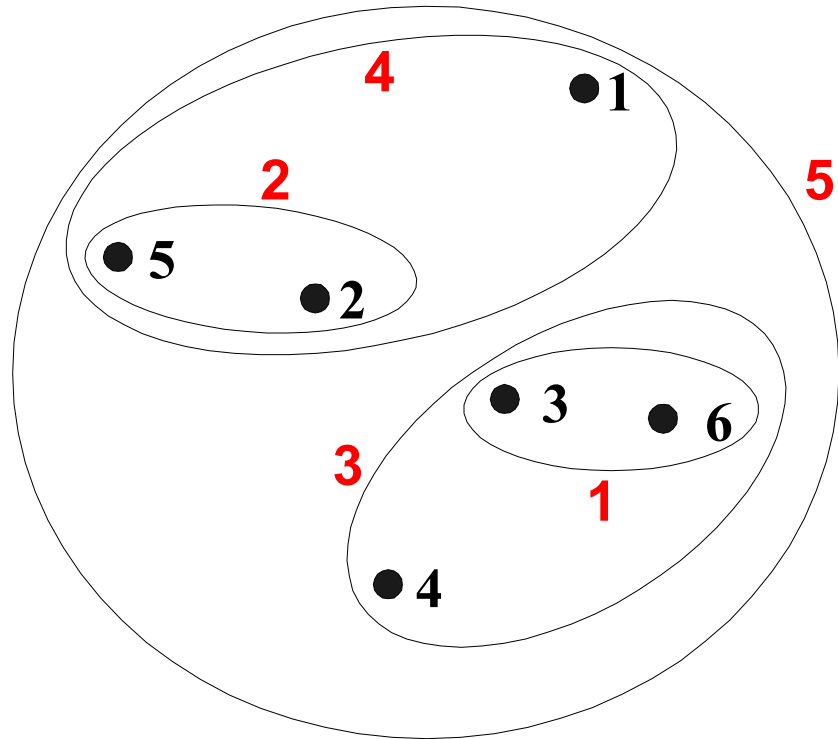


Nested Clusters

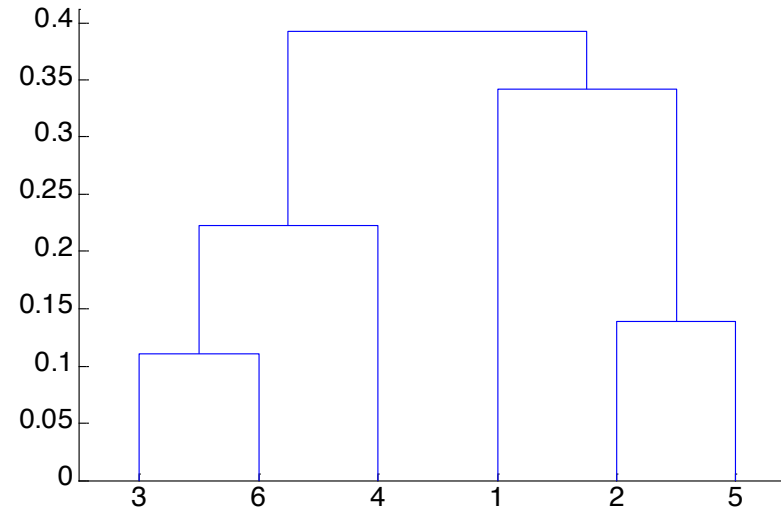


Dendrogram

Strength of MAX

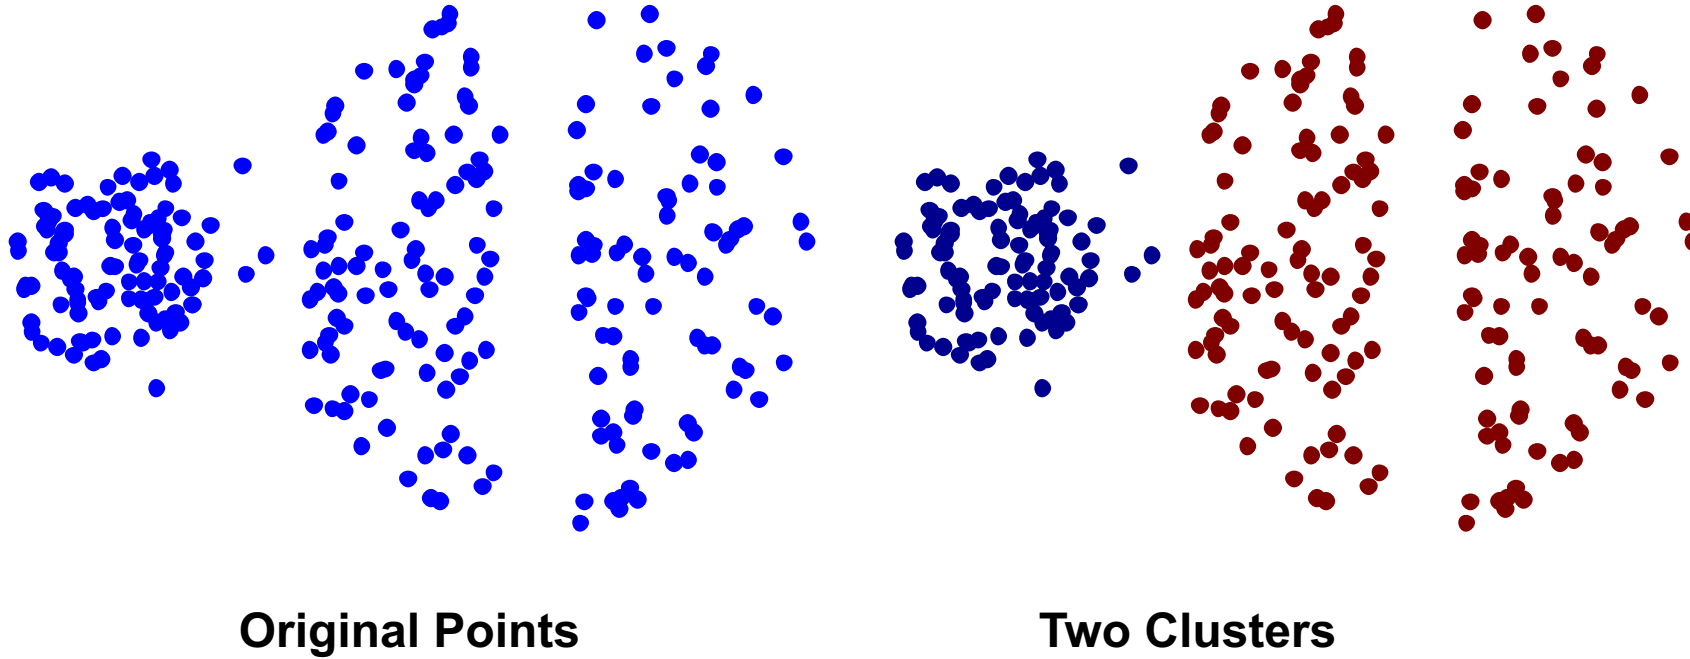


- Less susceptible to noise and outliers

Limitations of MAX

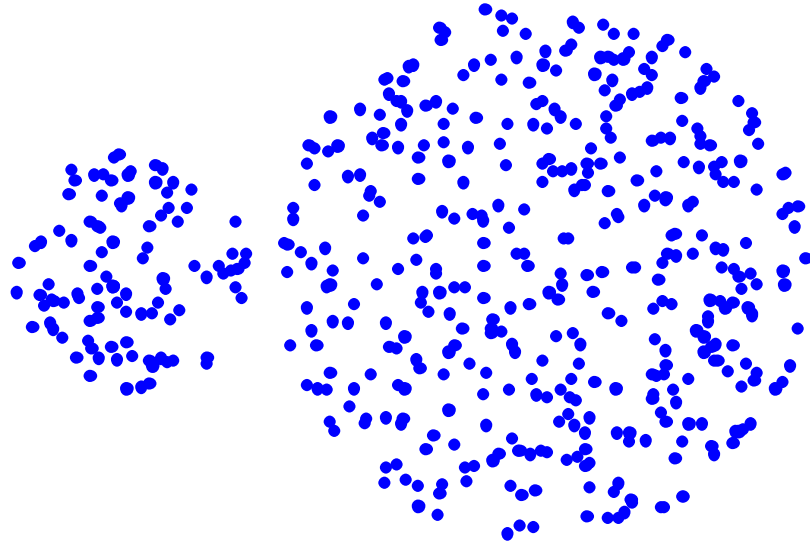

Original Points

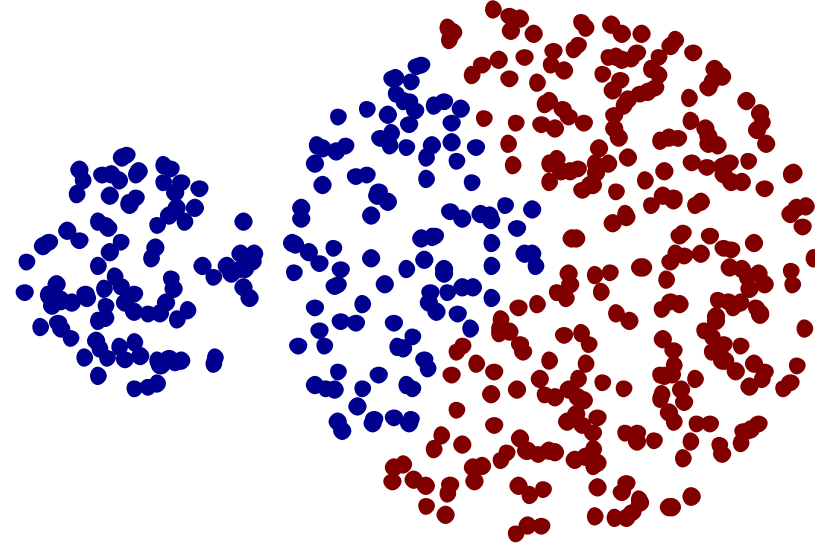

Two Clusters


- Tends to break large clusters
- Biased towards globular clusters

Group Average

- Proximity of two clusters is the average of pairwise proximity between points in the two clusters.

$$\text{proximity}(\text{Cluster}_i, \text{Cluster}_j) = \frac{\sum_{\substack{p_i \in \text{Cluster}_i \\ p_j \in \text{Cluster}_j}} \text{proximity}(p_i, p_j)}{|\text{Cluster}_i| \times |\text{Cluster}_j|}$$


- Need to use average connectivity for scalability since total proximity favors large clusters

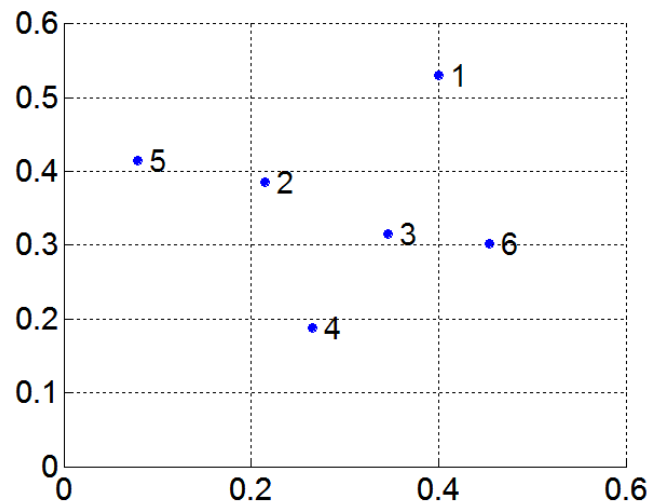


Distance Matrix:

| | p1 | p2 | p3 | p4 | p5 | p6 |
|----|------|------|------|------|------|------|
| p1 | 0.00 | 0.24 | 0.22 | 0.37 | 0.34 | 0.23 |
| p2 | 0.24 | 0.00 | 0.15 | 0.20 | 0.14 | 0.25 |
| p3 | 0.22 | 0.15 | 0.00 | 0.15 | 0.28 | 0.11 |
| p4 | 0.37 | 0.20 | 0.15 | 0.00 | 0.29 | 0.22 |
| p5 | 0.34 | 0.14 | 0.28 | 0.29 | 0.00 | 0.39 |
| p6 | 0.23 | 0.25 | 0.11 | 0.22 | 0.39 | 0.00 |

Hierarchical Clustering: Group Average

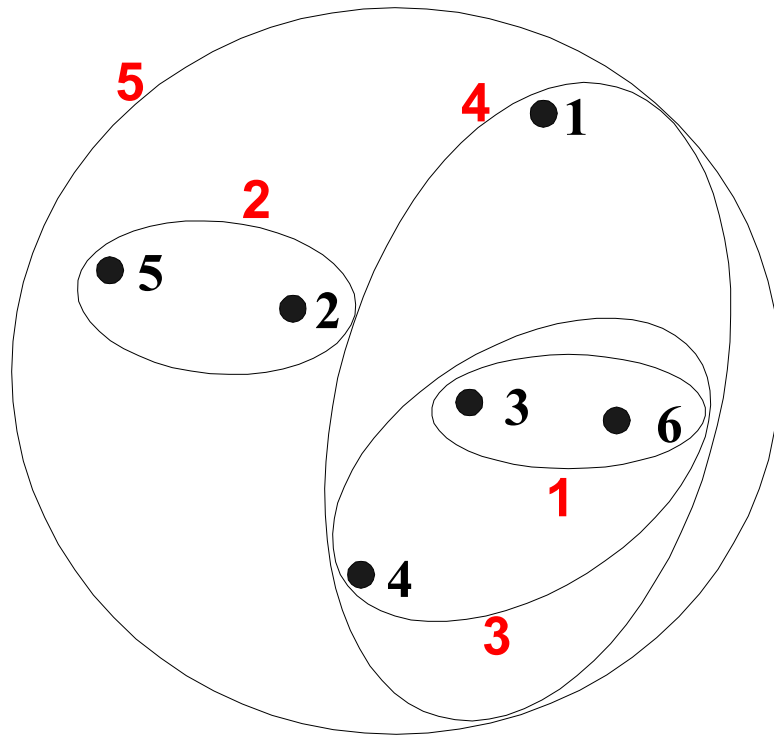

Nested Clusters

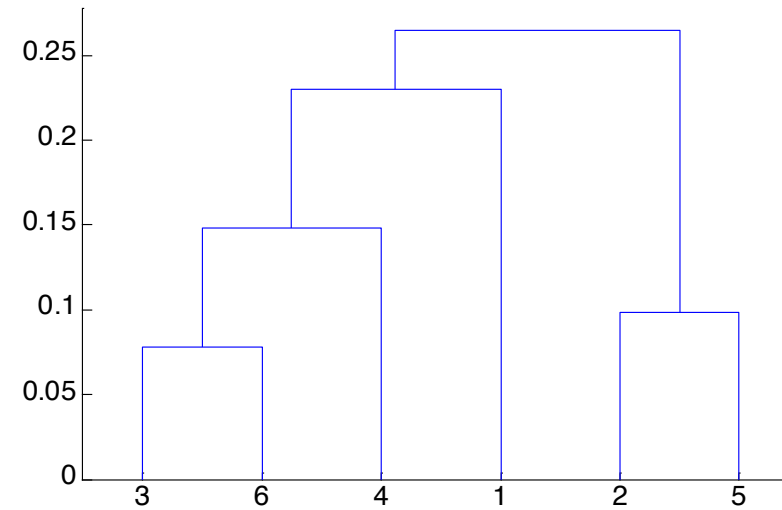

Dendrogram




Hierarchical Clustering: Group Average

- Compromise between Single and Complete Link
- Strengths
 - Less susceptible to noise and outliers
- Limitations
 - Biased towards globular clusters


Cluster Similarity: Ward's Method

- Similarity of two clusters is based on the increase in squared error when two clusters are merged
 - Similar to group average if distance between points is distance squared
- Less susceptible to noise and outliers
- Biased towards globular clusters
- Hierarchical analogue of K-means
 - Can be used to initialize K-means

Hierarchical Clustering: Comparison

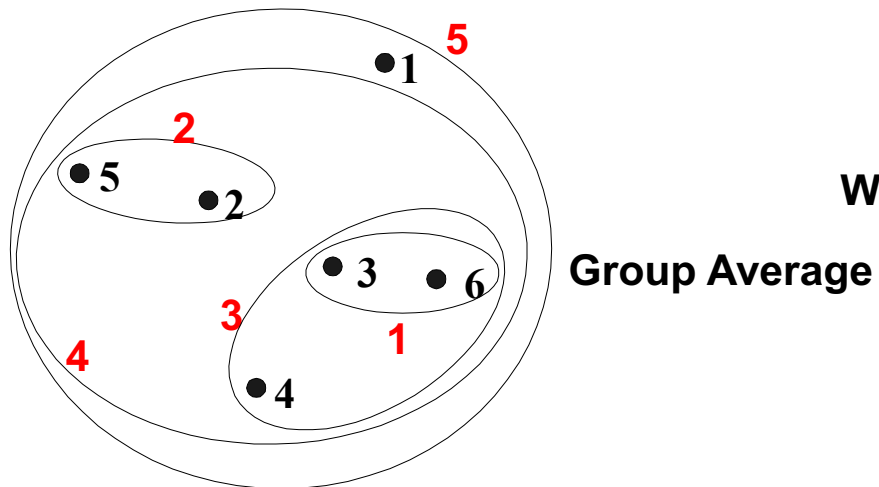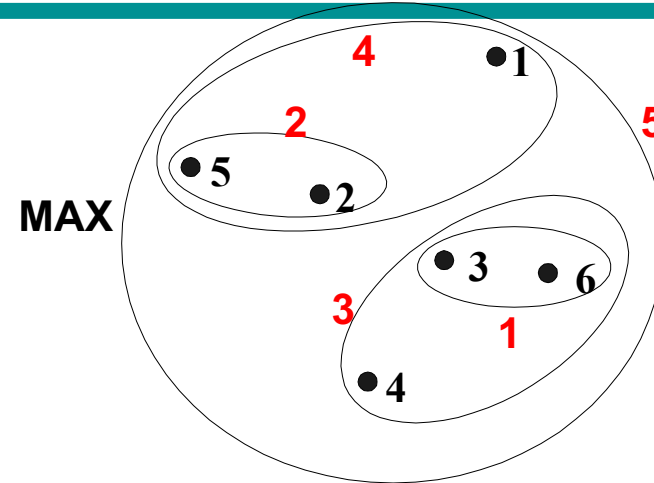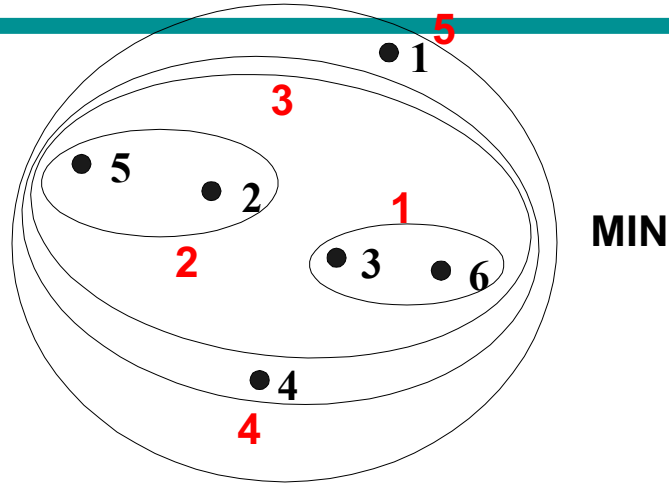

Ward's Method

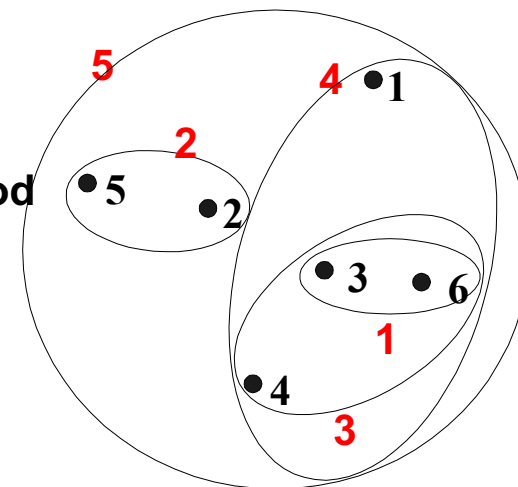

References

- Clustering. Chapter 7. Introduction to Data Mining.

