

PSC 2022/23 (375AA, 9CFU)

Principles for Software Composition

Roberto Bruni

<http://www.di.unipi.it/~bruni/>

<http://didawiki.di.unipi.it/doku.php/magistraleinformatica/psc/start>

25b - CTMC

Exponential distribution

Probability law

Cumulative distribution function (probability law)

$$X : \Omega \rightarrow \mathbb{R}$$

$$F_X(x) \triangleq P(X \leq x) = P(\{\omega \in \Omega \mid X(\omega) \leq x\})$$

$$P(X \leq a) = F_X(a)$$

$$P(X > a) = 1 - F_X(a)$$

$$P(a < X \leq b) = F_X(b) - F_X(a)$$

Probability density

$$X : \Omega \rightarrow \mathbb{R}$$

integrable $f_X : \mathbb{R} \rightarrow [0, +\infty)$

such that $F_X(a) = \int_{-\infty}^a f_X(x) dx$



i.e. $P(a < X \leq b) = \int_a^b f_X(x) dx$

note that $P(X = a)$ is usually 0 when X is continuous

(Negative) Exp distribution

rate λ

$$f_X(x) \triangleq \begin{cases} \lambda e^{-\lambda x} & \text{if } x \geq 0 \\ 0 & \text{if } x < 0 \end{cases} \quad F_X(x) \triangleq \begin{cases} 1 - e^{-\lambda x} & \text{if } x \geq 0 \\ 0 & \text{if } x < 0 \end{cases}$$

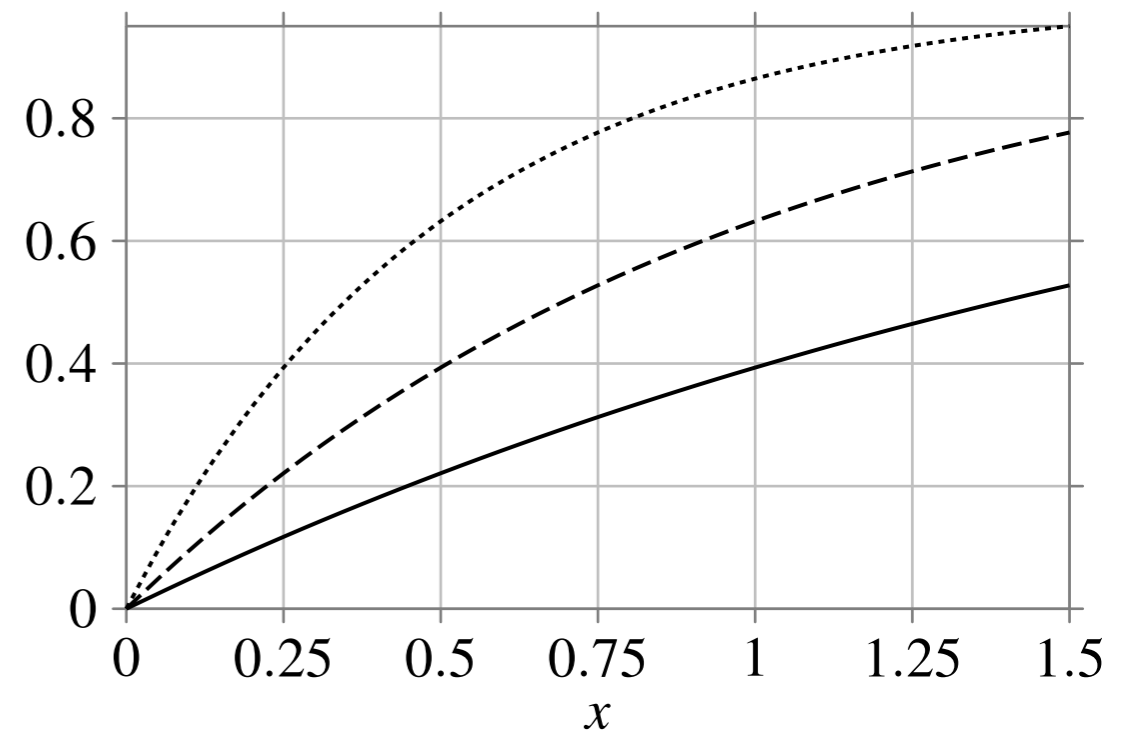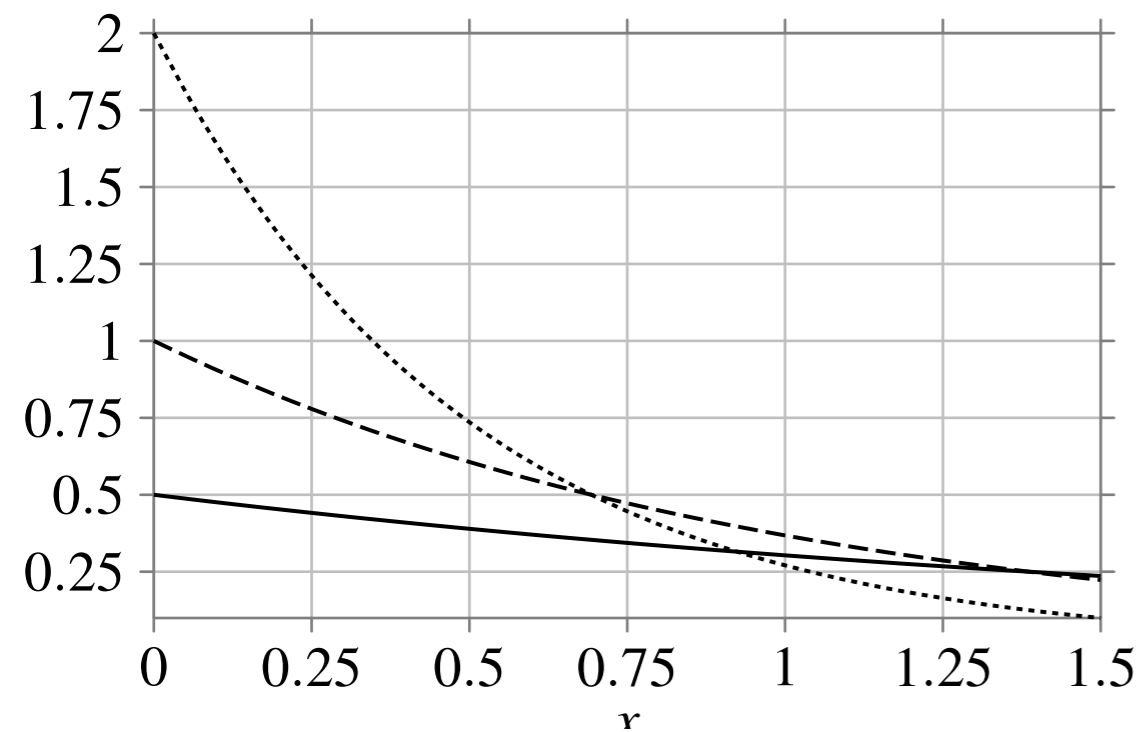

expected value (mean) $1/\lambda$

variance $1/\lambda^2$

Properties

memoryless $P(X > a + b | X > a) = P(X > b)$

(it is the only memoryless distribution)

(X_1, λ_1) (X_2, λ_2) (independent, exponentially distributed)

$$X(\omega) = \min\{X_1(\omega), X_2(\omega)\} \quad (X, \lambda_1 + \lambda_2)$$

$$P(X \leq x) \triangleq 1 - e^{-(\lambda_1 + \lambda_2)x}$$

related to sojourn time
in CTMC
exploited in PEPA

$$P(X_1 < X_2) \triangleq \frac{\lambda_1}{\lambda_1 + \lambda_2}$$

related to embedded DTMC
exploited in PEPA

(homogeneous) CTMC

CTMC

(Ω, \mathcal{A}, P) probability space $\{X_t\}_{t \in \mathbb{R}}$ homogeneous Markov chain

$$P(X_{t_n + \Delta t} = x | X_{t_n} = x_n, \dots, X_{t_0} = x_0) = P(X_{\Delta t} = x | X_0 = x_n)$$

let T_i be the time spent in state i
before making a transitions to any other state

$$P(T_i > t + \Delta t | T_i > t) = P(T_i > \Delta t)$$

$$P(T_i > 15 | T_i > 10) = P(T_i > 5)$$

the random variable T_i is memoryless

it must be exponentially distributed
rate λ_i , mean $1/\lambda_i$

CTMC

(Ω, \mathcal{A}, P) probability space $\{X_t\}_{t \in \mathbb{R}}$ homogeneous Markov chain

$$P(X_{t_n + \Delta t} = x | X_{t_n} = x_n, \dots, X_{t_0} = x_0) = P(X_{\Delta t} = x | X_0 = x_n)$$

let $T_{i,j}$ be the time spent in state i
before making a transition to state j

$$P(T_{i,j} > t + \Delta t | T_{i,j} > t) = P(T_{i,j} > \Delta t)$$

the random variable $T_{i,j}$ is memoryless

it must be exponentially distributed
rate $\lambda_{i,j}$, mean $1/\lambda_{i,j}$

$$T_i = \min_{j \neq i} T_{i,j}$$

$$\lambda_i = \sum_{j \neq i} \lambda_{i,j}$$

Embedded DTMC

(Ω, \mathcal{A}, P) probability space

$\{X_t\}_{t \in \mathbb{R}}$ homogeneous Markov chain

$$T_i = \min_{j \neq i} T_{i,j}$$

$$\lambda_i = \sum_{j \neq i} \lambda_{i,j}$$

$$p_{i,j} = P \left(\bigwedge_{k \neq i,j} T_{i,j} < T_{i,k} \right) = P \left(T_{i,j} < \min_{k \neq i,j} T_{i,k} \right) = \frac{\lambda_{i,j}}{\lambda_i}$$

$$P = \begin{bmatrix} 0 & p_{1,2} & \cdots & p_{1,N} \\ p_{2,1} & 0 & \cdots & p_{2,N} \\ \vdots & \vdots & \ddots & \vdots \\ p_{N,1} & p_{N,2} & \cdots & 0 \end{bmatrix} = \begin{bmatrix} 0 & \lambda_{1,2}/\lambda_1 & \cdots & \lambda_{1,N}/\lambda_1 \\ \lambda_{2,1}/\lambda_2 & 0 & \cdots & \lambda_{2,N}/\lambda_2 \\ \vdots & \vdots & \ddots & \vdots \\ \lambda_{N,1}/\lambda_N & \lambda_{N,2}/\lambda_N & \cdots & 0 \end{bmatrix}$$

Embedded DTMC

(Ω, \mathcal{A}, P) probability space $\{X_t\}_{t \in \mathbb{R}}$ homogeneous Markov chain

$$P = \begin{bmatrix} 0 & p_{1,2} & \cdots & p_{1,N} \\ p_{2,1} & 0 & \cdots & p_{2,N} \\ \vdots & \vdots & & \vdots \\ p_{N,1} & p_{N,2} & \cdots & 0 \end{bmatrix} = \begin{bmatrix} 0 & \lambda_{1,2}/\lambda_1 & \cdots & \lambda_{1,N}/\lambda_1 \\ \lambda_{2,1}/\lambda_2 & 0 & \cdots & \lambda_{2,N}/\lambda_2 \\ \vdots & \vdots & & \vdots \\ \lambda_{N,1}/\lambda_N & \lambda_{N,2}/\lambda_N & \cdots & 0 \end{bmatrix}$$

$\begin{cases} \pi = \pi \cdot P \\ \sum_{i=1}^N \pi_i = 1 \end{cases}$
 (if ergodic) we get a steady state distribution
 but the embedded DTMC ignores the amount of time spent in each state

Balance equations

(Ω, \mathcal{A}, P) probability space $\{X_t\}_{t \in \mathbb{R}}$ homogeneous Markov chain

let p_i be the long time proportion of time spent in state i
with respect to the time spent in other states

the flow in/out of each state i must balance

$\lambda_i p_i$ outgoing flow

rate at which transitions out of state i occur

$\lambda_{k,i} p_k$

rate at which transitions into state i occur from state k

$\sum_{k \neq i} \lambda_{k,i} p_k$ incoming flow

rate at which transitions into state i occur from other states

Infinitesimal matrix gen

(Ω, \mathcal{A}, P) probability space

$\{X_t\}_{t \in \mathbb{R}}$ homogeneous Markov chain

outgoing flow $\lambda_i p_i = \sum_{k \neq i} \lambda_{k,i} p_k$ incoming flow

$$\lambda_i = \sum_{j \neq i} \lambda_{i,j}$$

$$Q = \begin{bmatrix} -\lambda_1 & \lambda_{1,2} & \cdots & \lambda_{1,N} \\ \lambda_{2,1} & -\lambda_2 & \cdots & \lambda_{2,N} \\ \vdots & \vdots & & \vdots \\ \lambda_{N,1} & \lambda_{N,2} & \cdots & -\lambda_N \end{bmatrix}$$

$$\begin{cases} p \cdot Q = 0 \\ \sum_{i=1}^N p_i = 1 \end{cases}$$

Stationary distributions

$$P = \begin{bmatrix} 0 & p_{1,2} & \cdots & p_{1,N} \\ p_{2,1} & 0 & \cdots & p_{2,N} \\ \vdots & \vdots & & \vdots \\ p_{N,1} & p_{N,2} & \cdots & 0 \end{bmatrix} \quad \left\{ \begin{array}{l} \pi = \pi \cdot P \\ \sum_{i=1}^N \pi_i = 1 \end{array} \right.$$

$$Q = \begin{bmatrix} -\lambda_1 & \lambda_{1,2} & \cdots & \lambda_{1,N} \\ \lambda_{2,1} & -\lambda_2 & \cdots & \lambda_{2,N} \\ \vdots & \vdots & & \vdots \\ \lambda_{N,1} & \lambda_{N,2} & \cdots & -\lambda_N \end{bmatrix} \quad \left\{ \begin{array}{l} p \cdot Q = 0 \\ \sum_{i=1}^N p_i = 1 \end{array} \right.$$

π_i proportion of transitions into state i

$1/\lambda_i$ mean time spent into state i

if $\forall i, j. \lambda_i = \lambda_j$ then $\forall i. p_i = \pi_i$

$$p_i = \frac{\pi_i / \lambda_i}{\sum_j \pi_j / \lambda_j}$$

Example

A server can serve up to two requests

one/two new requests arrive with rate λ

one/two requests are served with rate μ

represent the system as a CTMC, by defining its

infinitesimal generator matrix

embedded DTMC

find the steady state distribution when $\lambda = \mu$

Example

A server can serve up to two requests

one/two new requests arrive with rate λ

one/two requests are served with rate μ

represent the system as a CTMC, by defining its

infinitesimal generator matrix

embedded DTMC

find the steady state distribution when $\lambda = \mu$

$$Q = \begin{bmatrix} -2\lambda & \lambda & \lambda \\ \mu & -\lambda - \mu & \lambda \\ \mu & \mu & -2\mu \end{bmatrix} \quad P = \begin{bmatrix} 0 & 1/2 & 1/2 \\ \mu/\lambda + \mu & 0 & \lambda/\lambda + \mu \\ 1/2 & 1/2 & 0 \end{bmatrix}$$

Example

find the steady state distribution when $\lambda = \mu$

$$Q = \begin{bmatrix} -2\lambda & \lambda & \lambda & \lambda & \lambda \\ \lambda & -2\lambda & \mu & \lambda & \lambda \\ \lambda & \lambda & \mu & -2\lambda & \lambda \\ \lambda & \lambda & \mu & -2\lambda & \lambda \\ \lambda & \lambda & \mu & -2\lambda & \lambda \end{bmatrix} \quad P = \begin{bmatrix} 0 & 0 & 1/2 & 1/2 & 0 \\ \mu/2 + \lambda & 0 & 0 & 0 & 0 \\ 1/2 & 1/2 & 0 & 0 & 0 \\ 1/2 & 1/2 & 0 & 0 & 0 \\ 1/2 & 1/2 & 0 & 0 & 0 \end{bmatrix} \quad \begin{bmatrix} 1/2 \\ \lambda/\lambda + \mu \\ 0 \\ 0 \\ 0 \end{bmatrix}$$

Example

find the steady state distribution when $\lambda = \mu$

$$Q = \begin{bmatrix} -2\lambda & \lambda & \lambda \\ \lambda & -2\lambda & \lambda \\ \lambda & \lambda & -2\lambda \end{bmatrix} \quad P = \begin{bmatrix} 0 & 1/2 & 1/2 \\ 1/2 & 0 & 1/2 \\ 1/2 & 1/2 & 0 \end{bmatrix}$$

$$\left\{ \begin{array}{l} -2\lambda p_1 + \lambda p_2 + \lambda p_3 = 0 \\ \lambda p_1 - 2\lambda p_2 + \lambda p_3 = 0 \\ \lambda p_1 + \lambda p_2 - 2\lambda p_3 = 0 \\ p_1 + p_2 + p_3 = 1 \end{array} \right. \quad \left\{ \begin{array}{l} \frac{1}{2}\pi_2 + \frac{1}{2}\pi_3 = \pi_1 \\ \frac{1}{2}\pi_1 + \frac{1}{2}\pi_3 = \pi_2 \\ \frac{1}{2}\pi_1 + \frac{1}{2}\pi_2 = \pi_3 \\ \pi_1 + \pi_2 + \pi_3 = 1 \end{array} \right.$$

$$p = [1/3 , 1/3 , 1/3]$$

$$\pi = [1/3 , 1/3 , 1/3]$$

CTMC as LTS

$$\alpha_C : S \rightarrow S \rightarrow \mathbb{R}$$

$$\alpha_C \ i \ j = \lambda_{i,j}$$

embedded DTMC

$$\alpha_D : S \rightarrow \mathbb{D}(S)$$

$$\alpha_D \ i \ j = \begin{cases} \frac{\lambda_{i,j}}{\sum_{k \neq i} \lambda_{i,k}} & \text{if } i \neq j \\ 0 & \text{otherwise} \end{cases}$$

can we derive a notion of equivalence between states?